
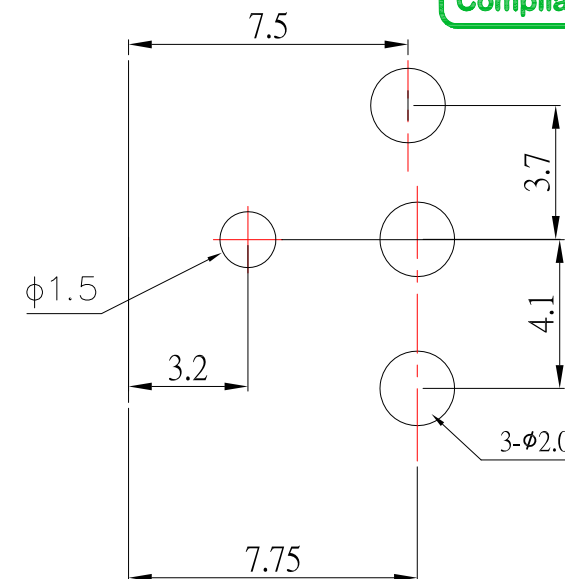
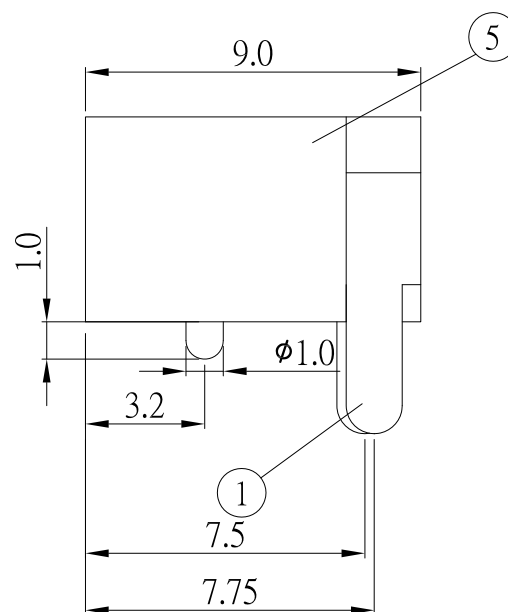


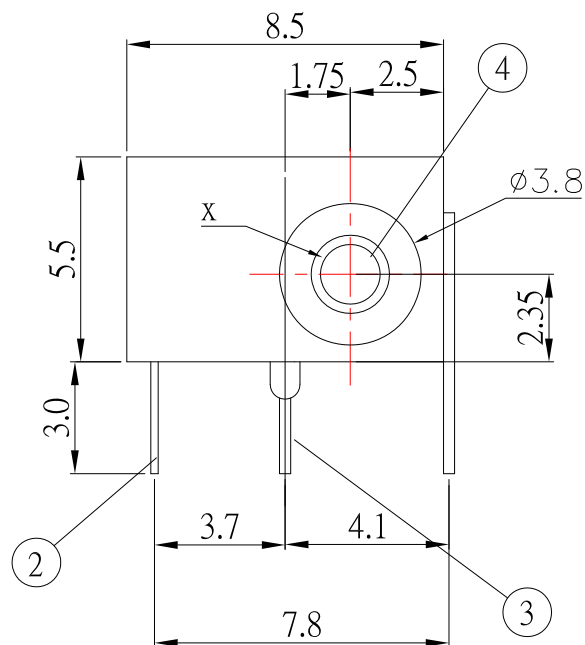

SPECIFICATION

- 1.Rating : DC 30V 0.5A ;
- 2.Contact resistance : $\leq 0.03 \Omega$;
- 3.Insulation resistance : $\geq 100 M \Omega$ (DC250V) ;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-30N;
- 6.life test : 5,000 cycles。

MODEL NO.	DC-011-x-S187
SCHEMATIC	
CENTER PIN	$\phi 1.0 \text{ mm}$
	$\phi 1.3 \text{ mm}$

1	FLAT FOOT	1	BRASS	Ag-Plating
2	SPRING PIECE	1	PHOSPHOR BRONZE	Ag-Plating
3	CURVE PIECE	1	BRASS	Ag-Plating
4	PIN	1	BRASS	Sn-Plating
5	HOUSING	1	PA	Black
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5	± 0.2	3RD. ANGEL'S		UNITS	MM
	Above 5 ~ 15	± 0.3				
	Above 15 ~ 30	± 0.4				
	Above 30 ~ 50	± 0.5				
	Angle	± 0.3°				

DRAWN BY:	DATE	MAT'L		TITLE	JACK	
Jack Lu	09/18/13					
CHECKED BY:	DATE	FINISH		MODLE	DC JACK	
Jacky Chen	09/18/13					
APPROVED BY:	DATE	SCALE	1 : 1	DWG NO.	DC-011-x-S187	SIZ A4
Tony Kao	09/18/13	SHEET NO.	1 of 1	PART NO.	DC-011-x-S187	VER

ITEM NO.	DESCRIPTION	DRAWN	DATE
----------	-------------	-------	------