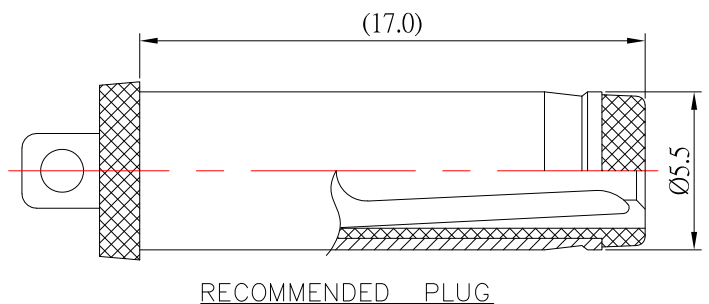
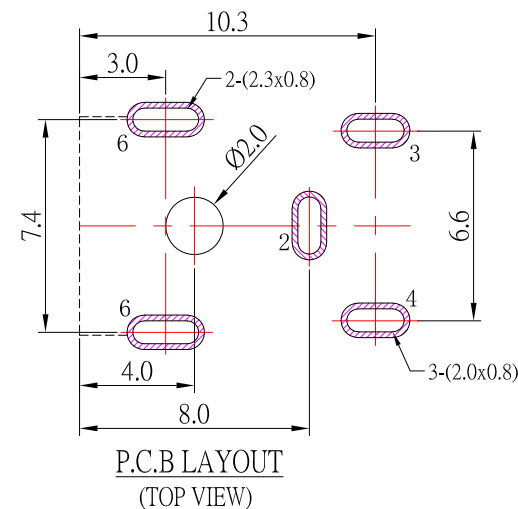
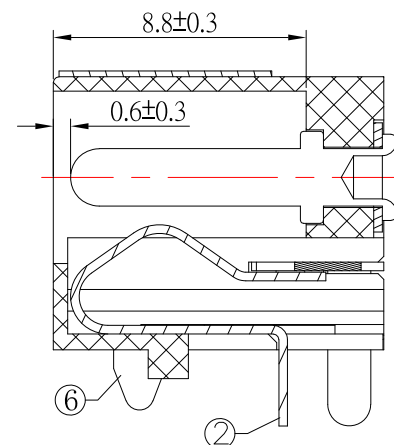
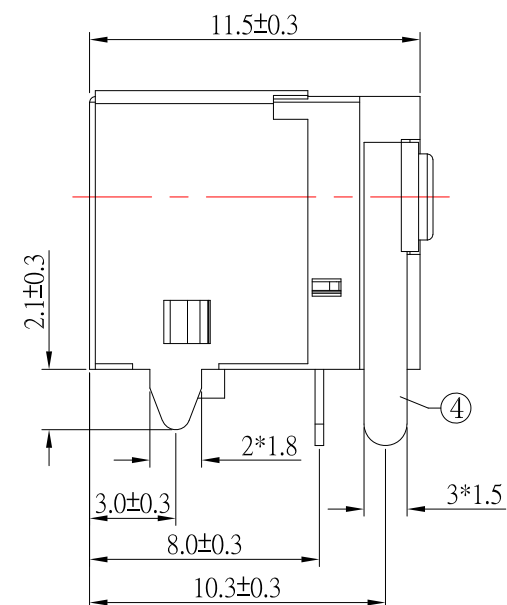
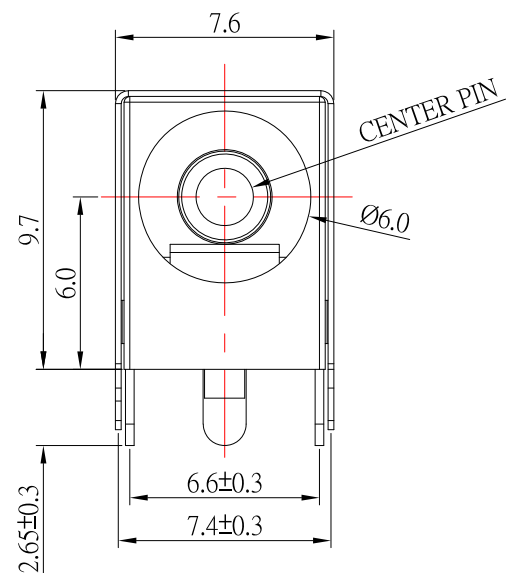



MODEL NO.	DC-038S-x-S124
SCHEMATIC	 4/5 (+) 3 2 (-)
CENTER PIN	Ø 2.0mm Ø 2.5mm

SPECIFICATION

- 1.Rating : DC 30V , 5.0A ;
- 2.Contact resistance : $\leq 30m\Omega$;
- 3.Insulation resistance : $\geq 100M\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-30N;
- 6.life test : 5,000 cycles °

⑥	Coat	1	Brass	Ni-Plating
⑤	Pin	1	Brass	Ni-Plating
④	Contact Foot	1	Brass	Ag-Plating
③	Curve Piece	1	Brass	Ag-Plating
②	Spring	1	Phosphor Bronze	Ag-Plating
①	Housing	1	PBT	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

2	更新圖面	Jack	050726
1	更新樣式	Jack	091020
ITEM NO.	DESCRIPTION	DRAWN	DATE



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5	±0.2
Above 5 ~ 15	±0.3
Above 15 ~ 30	±0.4
Above 30 ~ 50	±0.5
Angle	±0.3°

3RD. ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	05/07/26	FINISH	MODLE	DC JACK
CHECKED BY:	DATE	SCALE	DWG NO.	DC-038S-x-S124
Jacky Chen	05/07/26	1 : 1	PART NO.	DC-038S-x-S124
APPROVED BY:	DATE	SHEET NO.	1 of 1	
Tony Kao	05/07/26			