

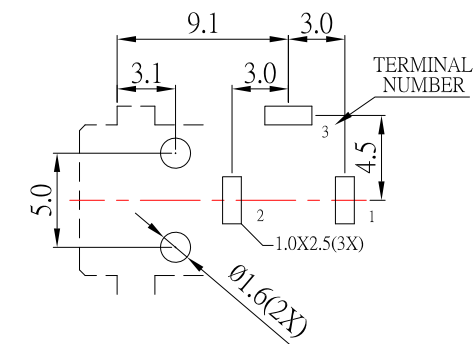
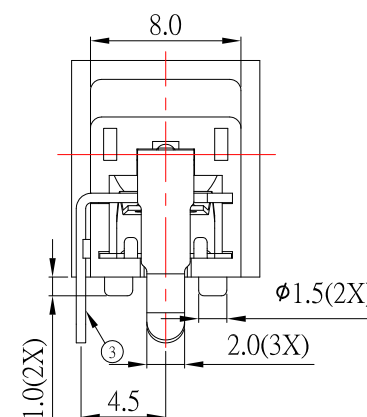
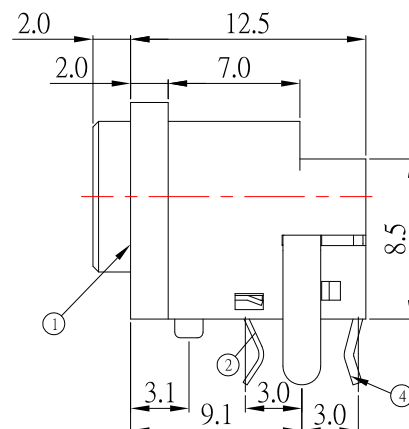
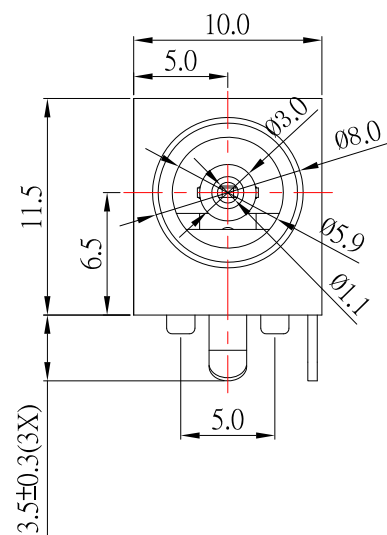


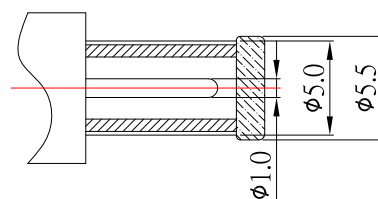

P.C.B LAYOUT
BOTTOM VIEW



DC MATE PLUG

MODEL NO.	DC-058-2-1.0
SCHEMATIC	

SPECIFICATION

- 1.Rating : DC 24V, 3.0A
- 2.Contact resistance : $\leq 50m\Omega$
- 3.Insulation resistance : $\geq 100M\Omega$
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-30N
- 6.life test : 5,000 cycles

4	PIN	1	BRASS	Tin-Plating
3	CONTACT	1	BRASS	Tin-Plating
2	CONTACT	1	COPPER ALLOY	Tin-Plating
1	HOUSING	1	PBT	Black
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	08/14/18			
CHECKED BY:	DATE	FINISH	MODLE	DC JACK HOUSING:PBT
Jacky Chen	08/14/18			
APPROVED BY:	DATE	SCALE	DWG NO.	DC-058-2-1.0-S214
Tony Kao	08/14/18	1 : 1	PART NO.	DC-058-2-1.0-S214
		SHEET NO.	1 of 1	
				SIZE A4
				VER R1

1	更新MODLE	Jack	081418
ITEM NO.	DESCRIPTION	DRAWN	DATE