


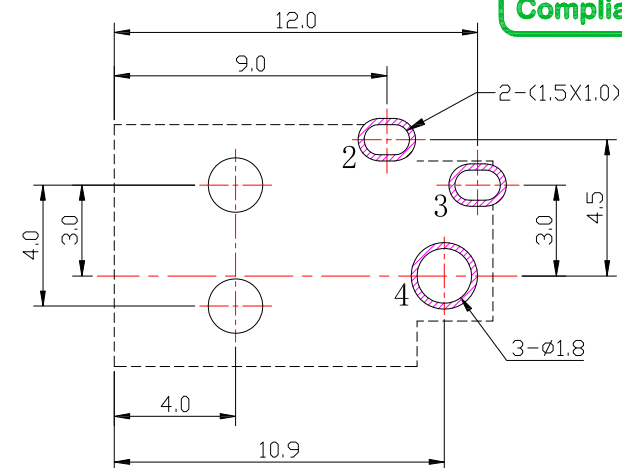
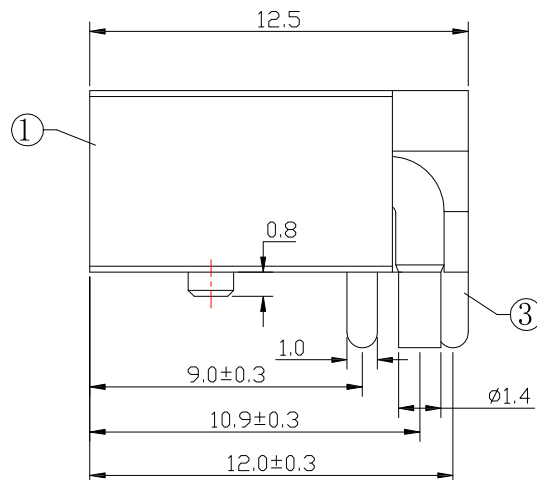


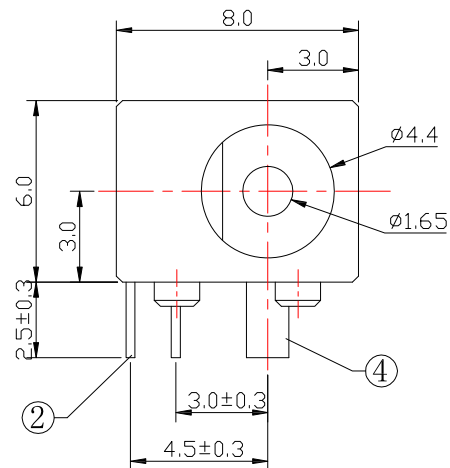

P.C.B LAYOUT  
(TOP VIEW)

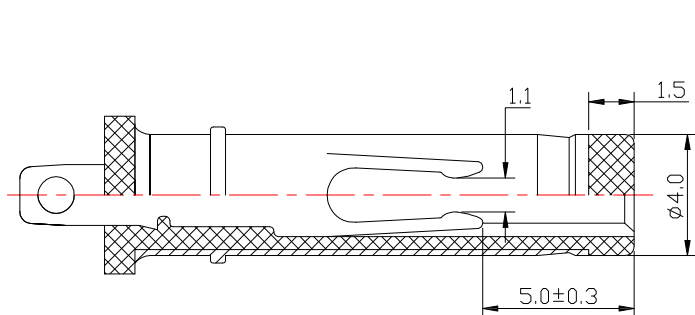

RECOMMENDED PLUG

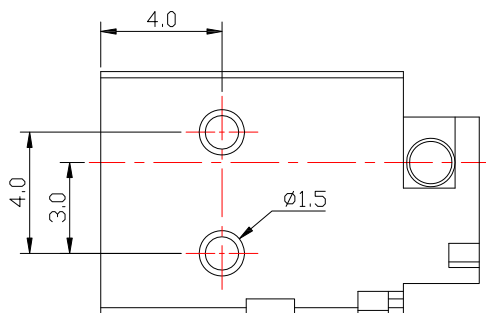

|           |        |
|-----------|--------|
| MODEL NO. | DC-066 |
| SCHEMATIC |        |

## SPECIFICATION

- 1.Rating : DC 30V , 2.0A ;
- 2.Contact resistance :  $\leq 30\text{m}\Omega$  ;
- 3.Insulation resistance :  $\geq 100\text{M}\Omega$  ;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-30N;
- 6.life test : 5,000 cycles .

|     |             |     |                 |            |
|-----|-------------|-----|-----------------|------------|
| 4   | PIN         | 1   | BRASS           | Ni-Plating |
| 3   | CURVE PIECE | 1   | BRASS           | Ag-Plating |
| 2   | SPRING      | 1   | PHOSPHOR BRONZE | Ag-Plating |
| 1   | HOUSING     | 1   | PBT             |            |
| NO. | DESCRIPTION | QTY | MATERIAL        | PLATING    |

[illegible]