

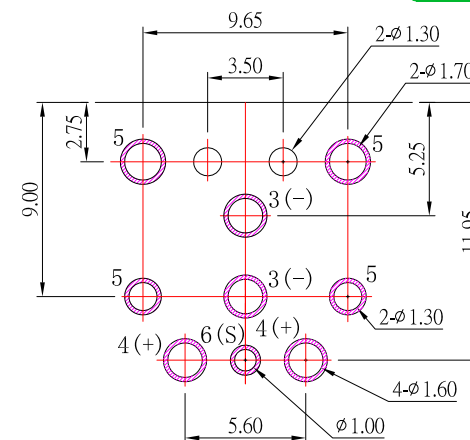
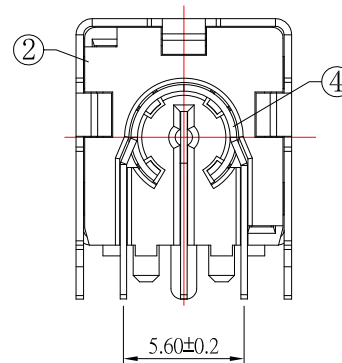
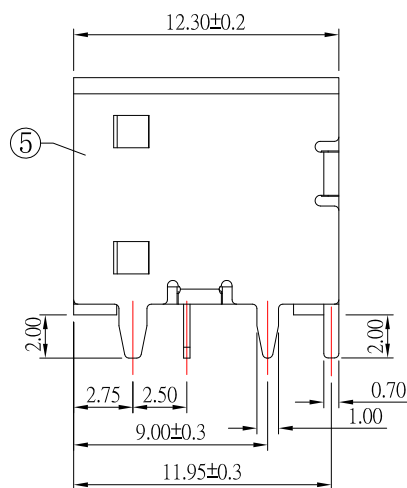


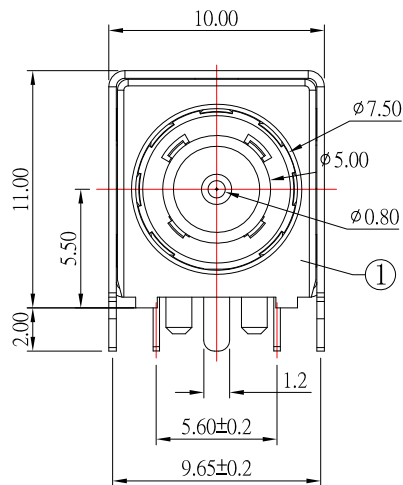


Technical drawing of a square column cross-section. The drawing shows a square column with a central vertical reinforcement bar (labeled 6) and two horizontal reinforcement bars (labeled 3). The column is surrounded by a concrete slab. Dimensions are given in millimeters (mm):

- Overall width: 350 mm
- Overall height: 625 mm
- Distance from top edge to reinforcement center: 275 mm
- Distance from center to reinforcement center: 120 mm (labeled 2- ϕ 120)

 4 POWER PIN(+)
 6 CENTER PIN
 3 GROUND PIN(-)



- 1.Rating : DC 20V,10.0A
- 2.Contact resistance : $\leq 30\text{m}\Omega$
- 3.Insulation resistance : $\geq 100\text{M}\Omega$
- 4.Withstand voltage : 150VAC
- 5.Insertion and extraction force : 3-30N
- 6.life test : 5,000 cycles

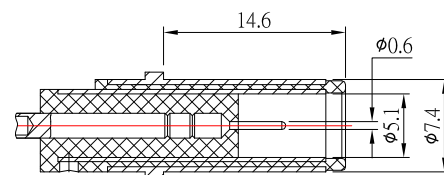

RECOMMENDED PLUG

⑥	PIN	1	PHOSPHOR BRONZE	Au-Plating
⑤	COAT	1	BRASS	Ni-Plating
④	SPRING PIECE	1	PHOSPHOR BRONZE	Au-Plating
③	SPRING PIECE	1	PHOSPHOR BRONZE	Au-Plating
②	COVER	1	LCP	
①	HOUSING	1	LCP	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING
DRAWN BY: Jack Lu	DATE 11/11/21	MAT'L		TITLE JACK
CHECKED BY: Jacky Chen	DATE 11/11/21	FINISH		MODLE DC JACK
APPROVED BY: Tony Kao	DATE 11/11/21	SCALE	1 : 1	DWG NO. DC-093HS1-0.6-S124
		SHEET NO.	1 of 1	PART NO. DC-093HS1-0.6-S124

CONTACT

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5	± 0.2
	Above 5 ~ 15	± 0.3
	Above 15 ~ 30	± 0.4
	Above 30 ~ 50	± 0.5
	Angle	± 0.3°

3RD.
ANGEL'S



UNITS

MM

3	更新材質	Jack	111121
2	新增插入深度尺寸	Jack	050721
1	更新料號	Jack	010721
ITEM NO.	DESCRIPTION	DRAWN	DATE