
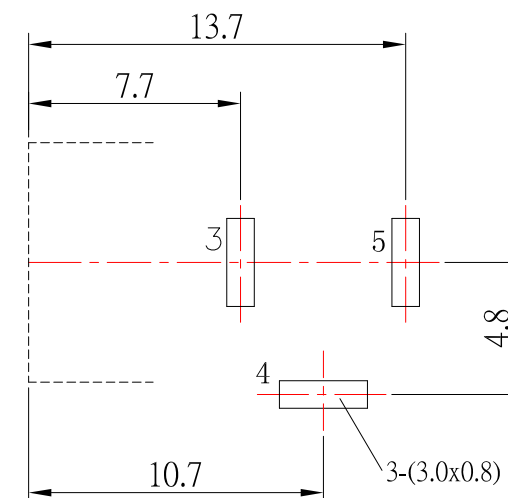
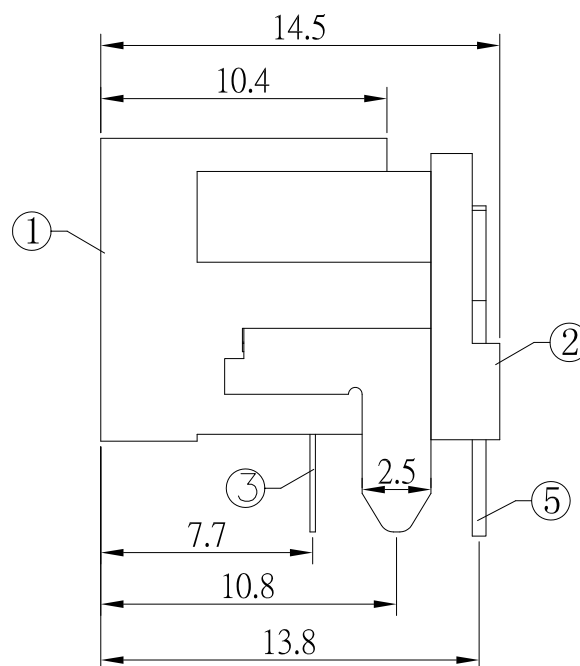


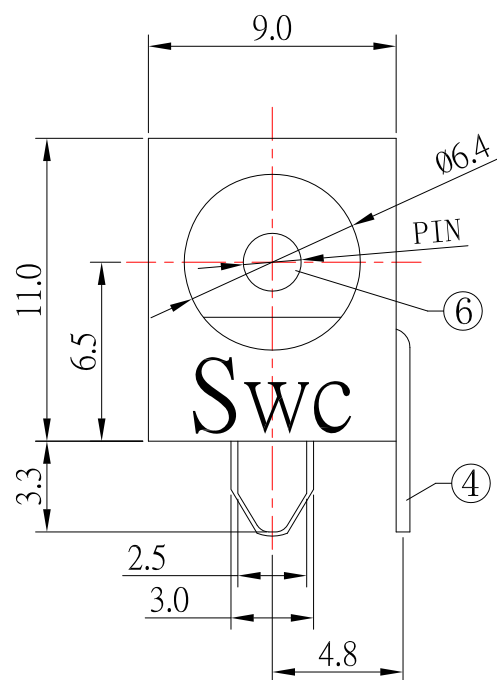

Model No.	DC-D096-x
SCHMATIC	
CENTER PIN	$\varnothing 2.00 \text{ mm}$ $\varnothing 2.50 \text{ mm}$

- 1.Rating : DC 30V 1.0A
- 2.Contact resistance : $\leq 0.03 \Omega$
- 3.Insulation resistance : $\geq 100M\Omega$ (DC250V)
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-20N
- 6.life test : 5,000 cycles

6	PIN	1	BRASS	Ni-Plating
5	FLAT FOOT	1	BRASS	Ag-Plating
4	CURVE PIECE	1	BRASS	Ag-Plating
3	SPRING PIECE	1	SUS301	Ag-Plating
2	COVER	1	PA9T	
1	HOUSING	1	PA9T	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

				CONTACT 建倚科技股份有限公司 CONTACT TECHNOLOGY CORP. TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3° 3RD. ANGEL'S  UNITS MM	DRAWN BY:	DATE	MAT'L		TITLE	JACK	
					Jack Lu	04/10/14	FINISH		MODLE	DC JACK	
					CHECKED BY:	DATE					
					Jacky Chen	04/10/14	SCALE	1 : 1	DWG NO.	DC-D096-x-S125	SIZE A4
1	新增LOGO	Jack	041014				APPROVED BY:	DATE	SHEET NO.	PART NO.	DC-D096-x-S125
ITEM NO.	DESCRIPTION	DRAWN	DATE			Tony Kao	04/10/14				