

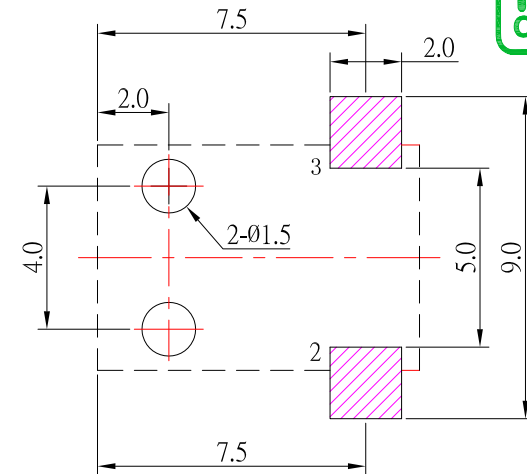
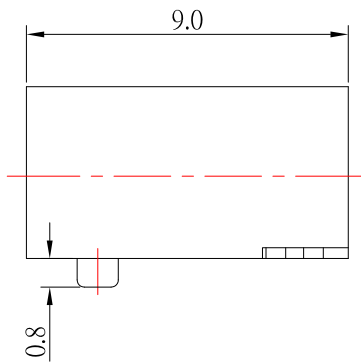
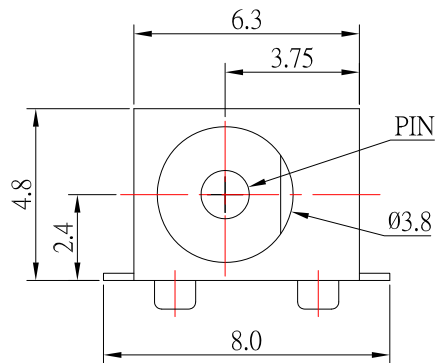
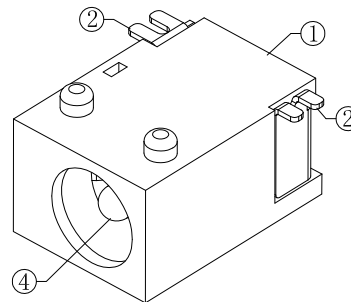






P.C.B LAYOUT TOP VIEW

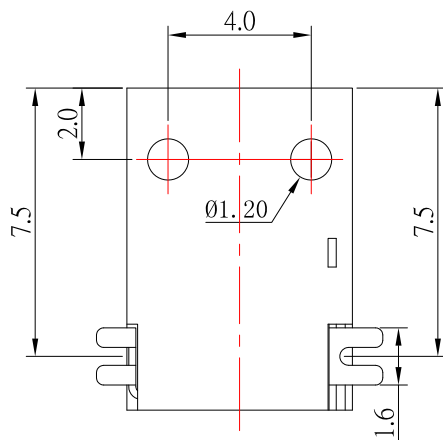

SPECIFICATION

- 1.Rating : DC 30V 2.0A ;
- 2.Contact resistance : $\leq 30\text{m}\Omega$;
- 3.Insulation resistance : $\geq 100\text{M}\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-20N
- 6.life test : 5,000 cycles °

MODEL NO.	DC-S047-x-S124
SCHEMATIC	 3 (4)  2
CENTER PIN	$\phi 1.00\text{ mm}$ $\phi 1.30\text{ mm}$

4	PIN	1	BRASS	Ni-Plating
3	CURVE PIECE	1	BRASS	Ag-Plating
2	SPRING PIECE	1	SUS301	Ag-Plating
1	HOUSING	1	PPA	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	02/21/17	FINISH	MODLE	DC JACK
CHECKED BY:	DATE	SCALE	DWG NO.	DC-S047-x-S124
Jacky Chen	02/21/17	1 : 1	PART NO.	DC-S047-x-S124
APPROVED BY:	DATE	SHEET NO.	1 of 1	
Tony Kao	02/21/17			

1	更新為A0版	Jack	022117
ITEM NO.	DESCRIPTION	DRAWN	DATE