



***MATERIAL**

- TERMINAL 1 : PHOSPHOR BRONZE
- TERMINAL 2 : PHOSPHOR BRONZE
- TERMINAL 3 : PHOSPHOR BRONZE
- TERMINAL 4 : PHOSPHOR BRONZE
- TERMINAL 10 : BRASS
- HOUSING : PA6T

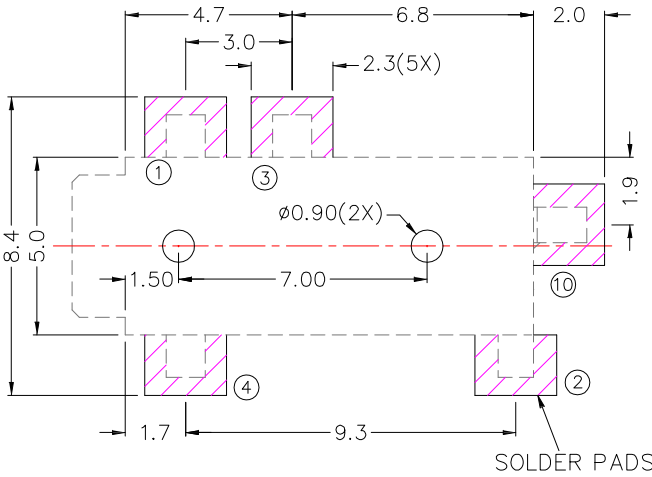


RECOMMENDED
SOLDER PAD LAYOUT

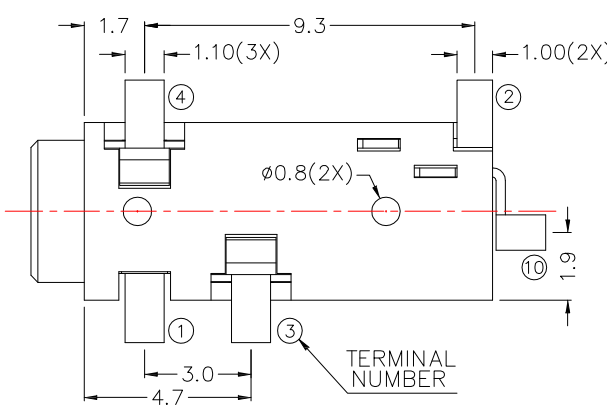

SPECIFICATION

- 1. Rating : DC 12V 1.0A
- 2. Contact resistance : $\leq 50m\Omega$
- 3. Insulation resistance : $\geq 100M\Omega$
- 4. Withstand voltage : 500VAC
- 5. Insertion and extraction force : 3-30N
- 6. Life test : 5,000 cycles



2.5 MATE PLUG

MODEL NO.	PJ-2765D	PJ-2764D	PJ-2764AD
SCHEMATIC			