
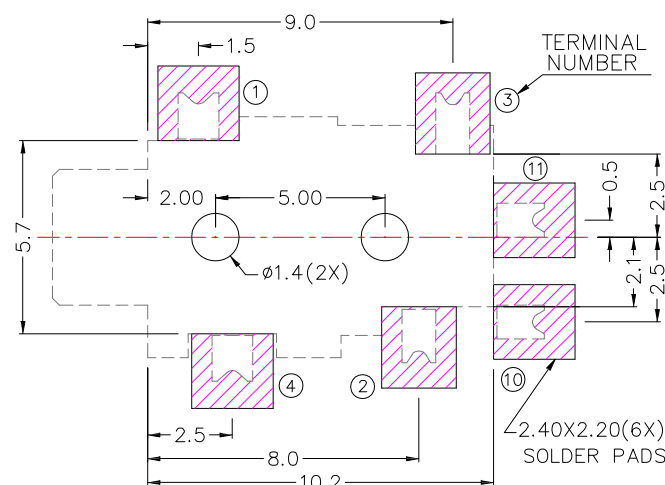
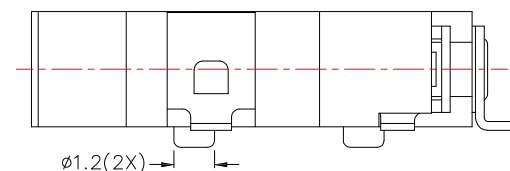
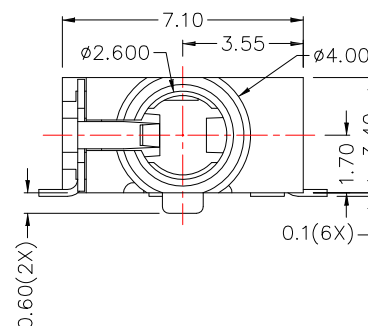





1. Rating : DC 12V 1.0A
2. Contact resistance : $\leq 50\text{m}\Omega$
3. Insulation resistance : $\geq 100\text{M}\Omega$
4. Withstand voltage : 500VAC
5. Insertion and extraction force : 3-30N
6. life test : 5,000 cycles

TERMINAL 1 :PHOSPHOR BRONZE
 TERMINAL 2 :PHOSPHOR BRONZE
 TERMINAL 3 :PHOSPHOR BRONZE
 TERMINAL 4 :PHOSPHOR BRONZE
 TERMINAL 10:BRASS
 TERMINAL 11:BRASS
 HOUSING :PA6T

RECOMMENDED
SOLDER PAD LAYOUT

MODEL NO.	PJ-2796D	PJ-2795AD	PJ-2795BD	PJ-2795D	PJ-2794D
SCHEMATIC					

					 建倚科技股份有限公司 CONTACT TECHNOLOGY CORP. TOLERANCE UNLESS OTHERWISE STATED: <table><tr><td>Up to 5</td><td>±0.2</td></tr><tr><td>Above 5 ~ 15</td><td>±0.3</td></tr><tr><td>Above 15 ~ 30</td><td>±0.4</td></tr><tr><td>Above 30 ~ 50</td><td>±0.5</td></tr><tr><td>Angle</td><td>±0.3°</td></tr></table> 3RD. ANGEL'S  UNITS MM	Up to 5	±0.2	Above 5 ~ 15	±0.3	Above 15 ~ 30	±0.4	Above 30 ~ 50	±0.5	Angle	±0.3°	DRAWN BY:	DATE	MAT'L		TITLE	JACK
Up to 5	±0.2																				
Above 5 ~ 15	±0.3																				
Above 15 ~ 30	±0.4																				
Above 30 ~ 50	±0.5																				
Angle	±0.3°																				
					Jack Lu	11/04/15															
					CHECKED BY:	DATE	FINISH		MODLE	PHONE JACK											
					Jacky Chen	11/04/15															
							SCALE	1 : 1	DWG NO.	PJ-279xD											
1	新增SPEC	Jack	110415							SHEET NO.	1 of 1	PART NO.	PJ-279xD	SIZE	A4	VER	A1				
ITEM NO.	DESCRIPTION	DRAWN	DATE																		
	A	B		C	D	E	F	G	H	I	J	K	L	M	N	O	P				