



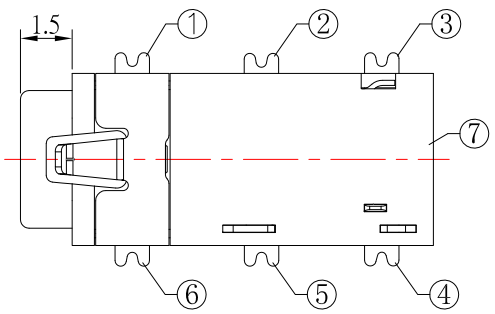


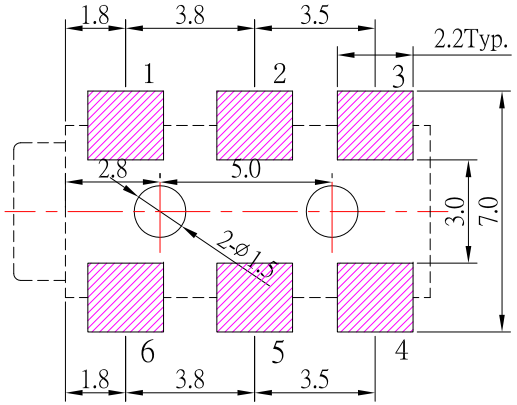


P.C.B LAYOUT MOUNTING PATTERN
(TOP VIEW)




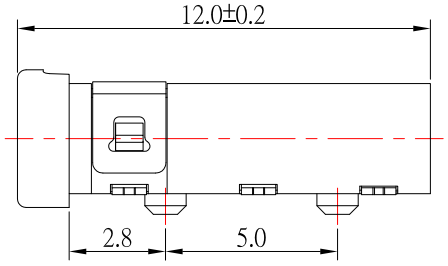

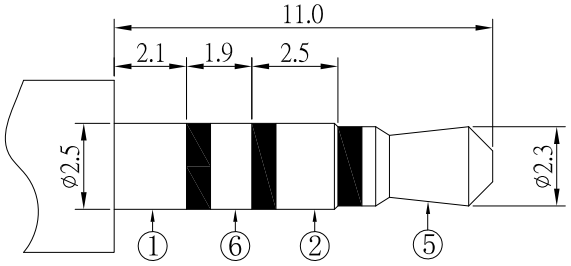

ø2.50mm 4 POLE PLUG

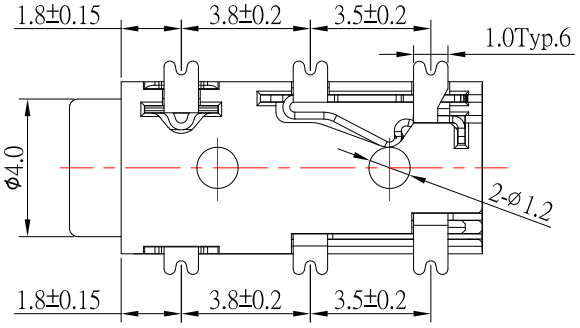



SPECIFICATION

1.Rating: DC 30V, 1.0A
2.Contact resistance: ≤50mΩ
3.Insulation resistance: ≥100MΩ
4.Withstand voltage: 500VAC
5.Insertion and extraction force: 3-20N
6.life test: 5,000 cycles

NO.	DESCRIPTION	QTY	MATERIAL	REMARK
⑦	HOUSING	1	PA9T	
⑥	CONTACT FOOT #6	1	Phosphor Bronze	Au Plated over Ni
⑤	CONTACT FOOT #5	1	Phosphor Bronze	Au Plated over Ni
④	CONTACT FOOT #4	1	Phosphor Bronze	Au Plated over Ni
③	CONTACT FOOT #3	1	Phosphor Bronze	Au Plated over Ni
②	CONTACT FOOT #2	1	Phosphor Bronze	Au Plated over Ni
①	CONTACT FOOT #1	1	Phosphor Bronze	Au Plated over Ni

ITEM NO.	DESCRIPTION	DRAWN	DATE
2	更新鍍層	Jack	102621
1	更新圖面	Jack	010821

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ±0.2; Above 5 ~ 15 ±0.3; Above 15 ~ 30 ±0.4; Above 30 ~ 50 ±0.5; Angle ±0.3°

3RD. ANGEL'S | UNITS MM

DRAWN BY: Jack Lu	DATE 10/26/21	MAT'L	
CHECKED BY: Jacky Chen	DATE 10/26/21	FINISH	
APPROVED BY: Tony Kao	DATE 10/26/21	SCALE 1 : 1	SHEET NO. 1 of 1

TITLE	JACK		
MODLE	PHONE JACK		
DWG NO.	PJ-2866D-H3-S124	SIZE	A4
PART NO.	PJ-2866D-H3-S124	VER	R2