
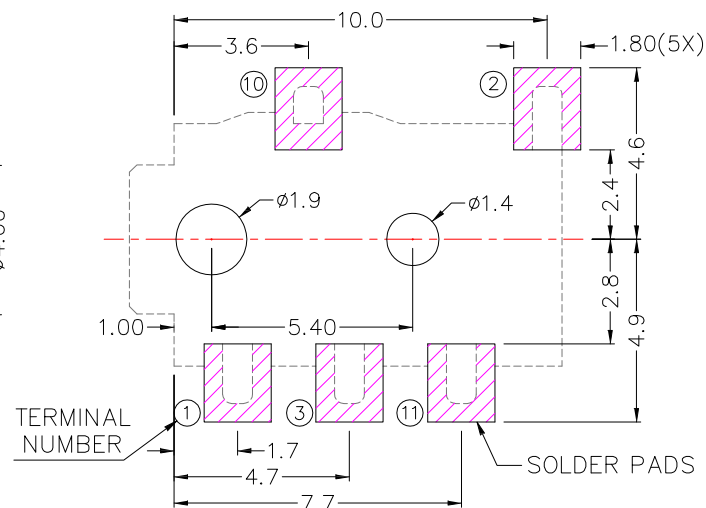
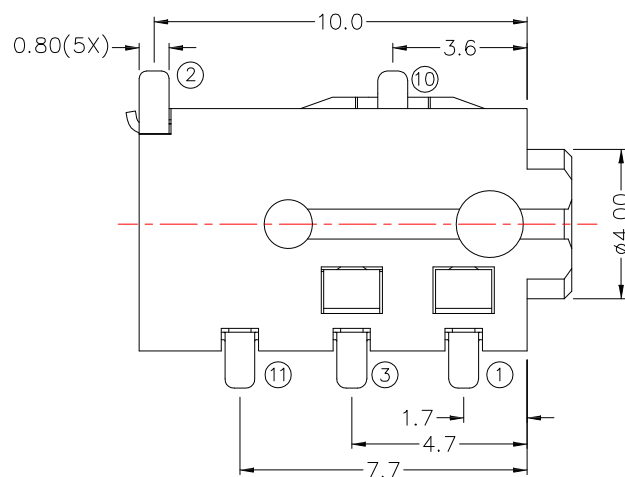
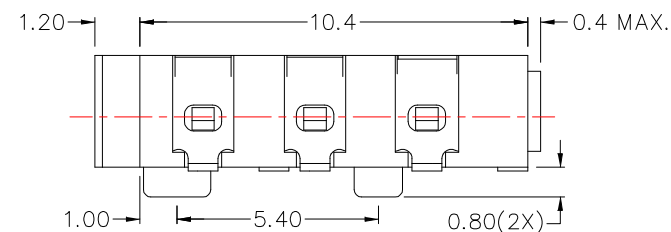
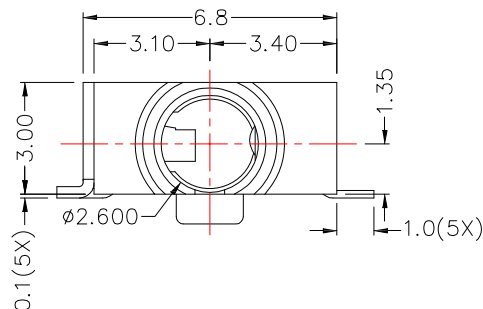


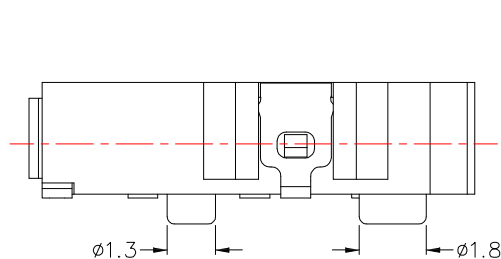

RECOMMENDED SOLDER PAD LAYOUT

MODEL NO.	PJ-2875D	PJ-2874AD	PJ-2874BD	PJ-2873D	PJ-2873AD
SCHEMATIC					

SPECIFICATION

1. Rating : DC 12V 1.0A
2. Contact resistance : $\leq 50m\Omega$
3. Insulation resistance : $\geq 100M\Omega$
4. Withstand voltage : 500VAC
5. Insertion and extraction force : 3-30N
6. life test : 5,000 cycles

*MATERIAL

TERMINAL 1 : PHOSPHOR BRONZE
TERMINAL 2 : PHOSPHOR BRONZE
TERMINAL 3 : PHOSPHOR BRONZE
TERMINAL 10 : BRASS
TERMINAL 11 : PHOSPHOR BRONZE
HOUSING : PA6T



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 11/04/15
DATE: 11/04/15
DATE: 11/04/15

MAT'L		TITLE	JACK
FINISH		MODLE	PHONE JACK
SCALE	1 : 1	DWG NO.	PJ-287xD
SHEET NO.	1 of 1	PART NO.	PJ-287xD

SIZE
A4
VER
R1