




MODEL NO.	PJ-2966DT1	PJ-2965ADT1	PJ-2965BDT1	PJ-2964DT1
SCHEMATIC				

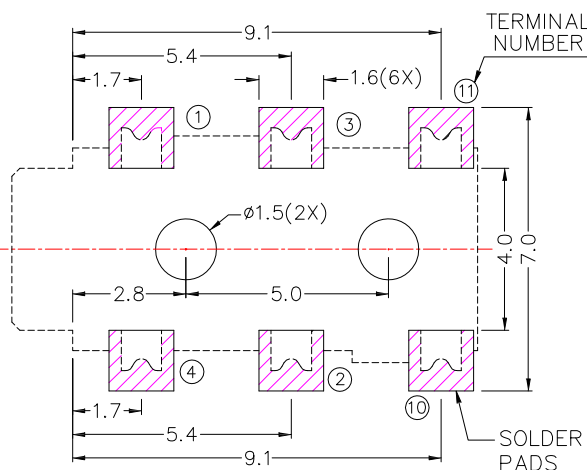

* MATERIAL

TERMINAL 1 : PHOSPHOR BRONZE
TERMINAL 2 : PHOSPHOR BRONZE
TERMINAL 3 : PHOSPHOR BRONZE
TERMINAL 4 : PHOSPHOR BRONZE
TERMINAL 10: PHOSPHOR BRONZE
TERMINAL 11: PHOSPHOR BRONZE
HOUSING : PA6T
TAPE : POLYIMIDE

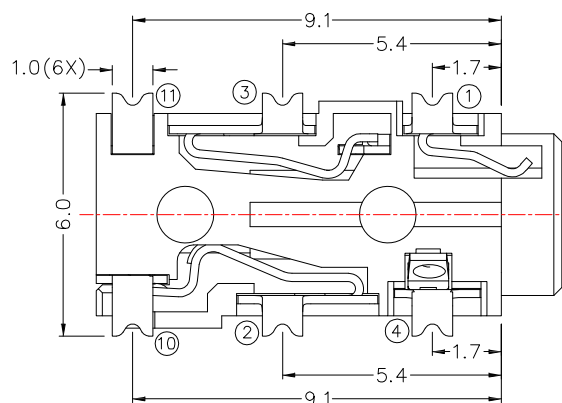

RECOMMENDED
SOLDER PAD LAYOUT

SPECIFICATION

- Rating : DC 12V 1.0A
- Contact resistance : $\leq 50\text{m}\Omega$
- Insulation resistance : $\geq 100\text{M}\Omega$ (DC500V)
- Withstand voltage : 500VAC
- Insertion and extraction force : 3-30N
- life test : 5,000 cycles



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 11/05/14
DATE: 11/05/14
DATE: 11/05/14

MAT'L
FINISH
SCALE: 1 : 1
SHEET NO. 1 of 1

TITLE: PHONE JACK
MODLE
DWG NO. PJ-296xDT1
PART NO. PJ-296xDT1

SIZE: A4
VER: A0

ITEM NO.	DESCRIPTION	DRAWN	DATE
1	更新為A0版	Jack	110514