


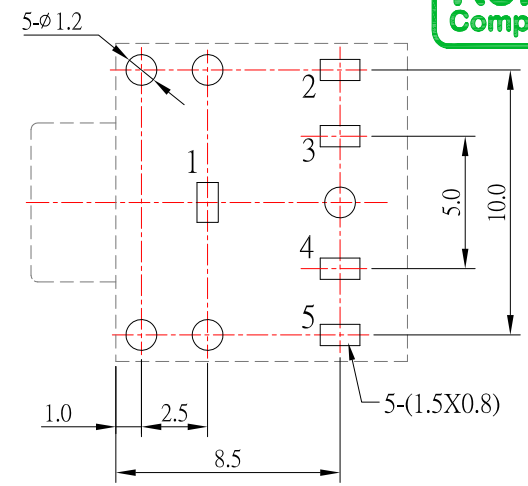
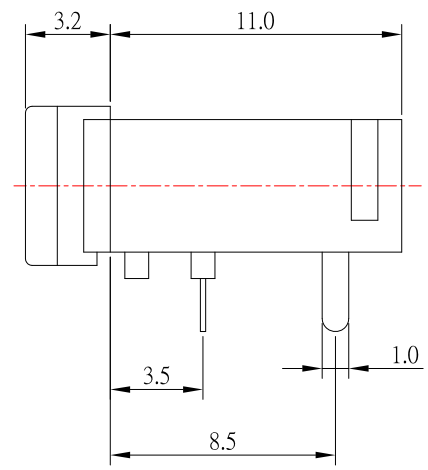
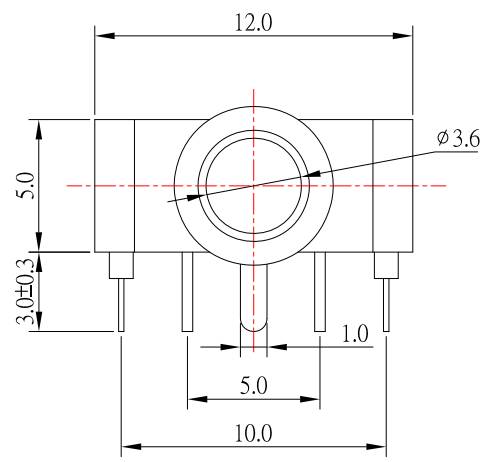


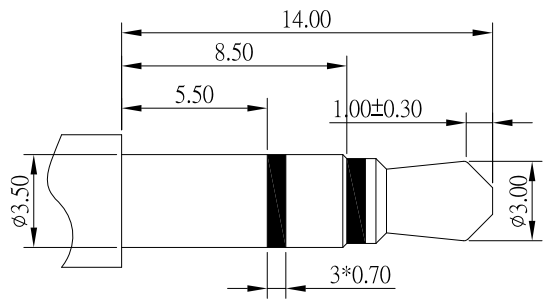

P.C.B LAYOUT
TOP VIEW

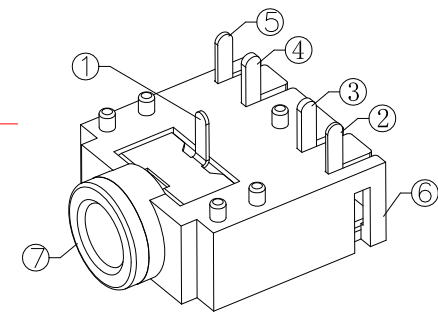

Ø3.50mm 3 POLE PLUG

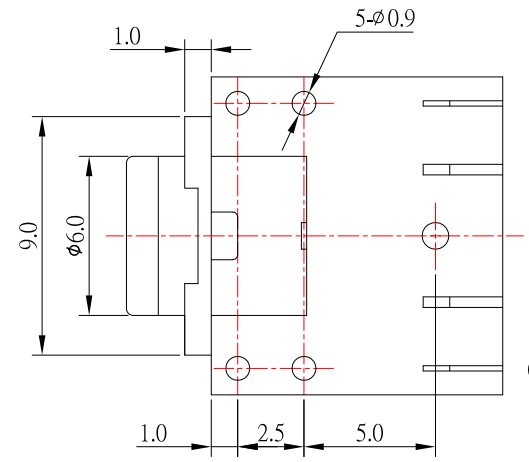

- SPECIFICATION**
- 1.Rating : DC 30V 0.5A ;
 - 2.Contact resistance : ≤ 30mΩ ;
 - 3.Insulation resistance : ≥ 100MΩ ;
 - 4.Withstand voltage : 500VAC ;
 - 5.Insertion and extraction force : 3-20N
 - 6.life test : 5,000 cycles °

SCHMATIC

PJ-3515	PJ-3514B	PJ-3514A	PJ-3513

7	AXIS SUPPORT	1	BRASS	Ni-Plating
6	HOUSING	1	PBT	
5	5# CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Plating
4	4# CONTACT FOOT	1	BRASS	Sn-Plating
3	3# CONTACT FOOT	1	BRASS	Sn-Plating
2	2# CONTACT FOOT	1	SUS	Sn-Plating
1	1# CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3°	3RD. ANGEL'S	UNITS	MM
-------------------------------------	--	--------------	-------	----

DRAWN BY:	DATE	MATL	TITLE	JACK
Jack Lu	05/22/20			
CHECKED BY:	DATE	FINISH	MODLE	PHONE JACK
Jacky Chen	05/22/20			
APPROVED BY:	DATE	SCALE	DWG NO.	PJ-351x-S124
Tony Kao	05/22/20	1 : 1		
		SHEET NO.	1 of 1	PART NO. PJ-351x-S124

1	更新樣式	Jack	052220
ITEM NO	DESCRIPTION	DRAWN	DATE