

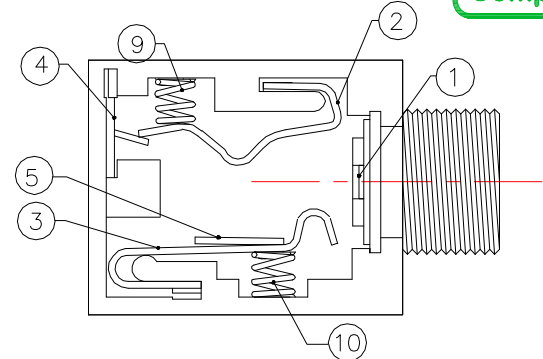
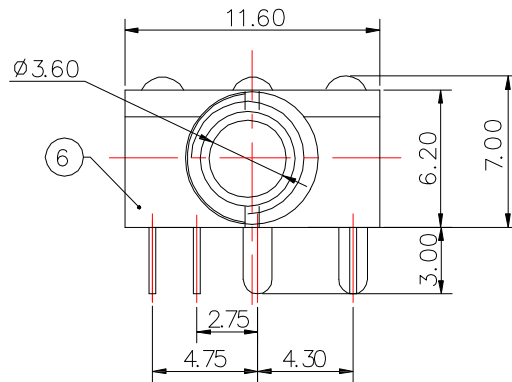


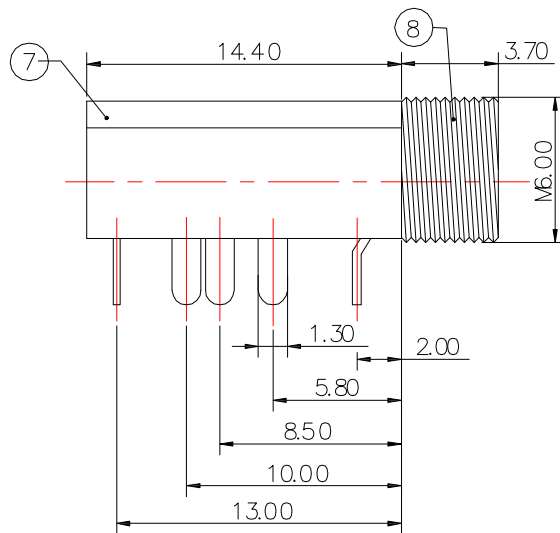


Internal construction

PJ-3525N




SPECIFICATION

- Rating : DC 30V 1.0A
- Contact resistance : $\leq 100\text{m}\Omega$
- Insulation resistance : $\geq 100\text{M}\Omega$
- Withstand voltage : 500VAC
- Insertion and extraction force : 3-25N
- life test : 5,000 cycles

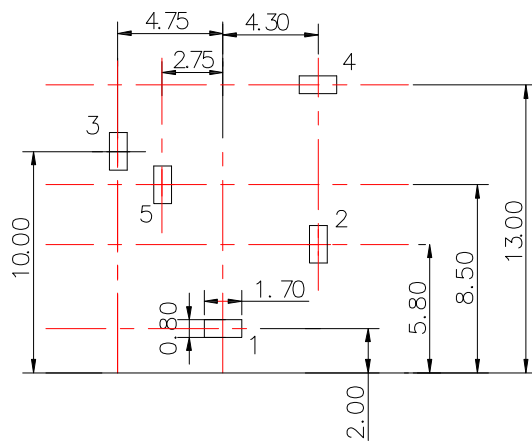

PCB LAYOUT

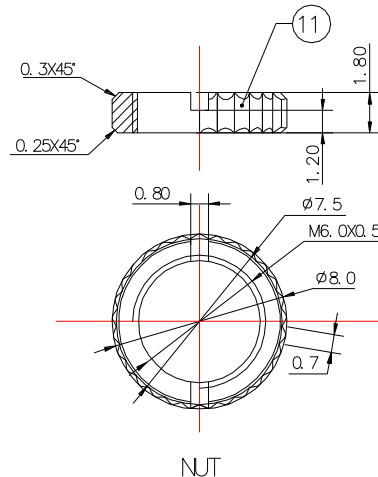

⑪	NUT	1	H59	Ni-Plating
⑩	SPRING-5	1	72A	Ni-Plating
⑨	SPRING-3	1	72A	Ni-Plating
⑧	SOCKET	1	H59	Ni-Plating
⑦	COVER	1	PC	Transparent
⑥	HOUSING	1	PA66	Black
⑤	TERMINAL-5	1	BRASS	Ag-Plating
④	TERMINAL-4	1	BRASS	Ag-Plating
③	TERMINAL-3	1	BRASS	Ag-Plating
②	TERMINAL-2	1	BRASS	Ag-Plating
①	TERMINAL-1	1	BRASS	Ag-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE
11/03/15
DATE
11/03/15
DATE
11/03/15

MAT'L
FINISH
SCALE

TITLE
MODLE
DWG NO.

JACK
PHONE JACK
PJ-3525N-S258

PART NO. PJ-3525N-S258

SIZE
A4
VER
R2

ITEM NO. DESCRIPTION

DRAWN DATE

Jack 110315

Jack 091815

2 新增SPEC

1 更新材質