
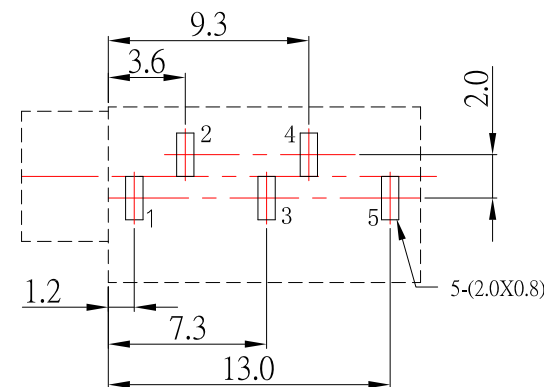
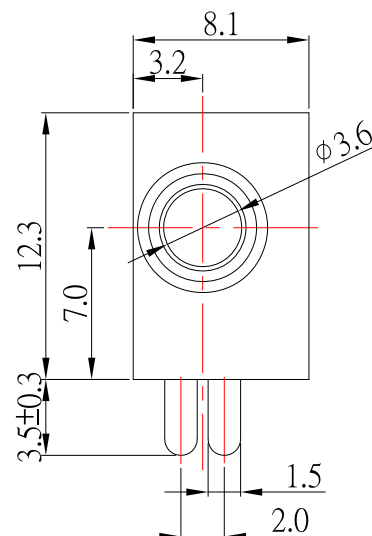


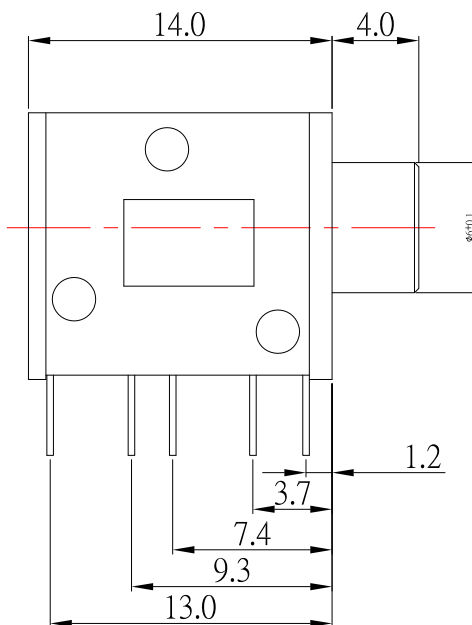

PJ-364x-x-S124

COLOR
Black: Blank
PINK : PI
Green : GR
Blue : BL



P.C.B LAYOUT
TOP VIEW

SCHEMATIC

PJ-3645	PJ-3644A	PJ-3643

SPECIFICATION

- 1.Rating : DC 30V 0.5A ;
- 2.Contact resistance : $\leq 0.03 \Omega$;
- 3.Insulation resistance : $\geq 100M \Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-30N;
- 6.life test : 5,000 cycles .

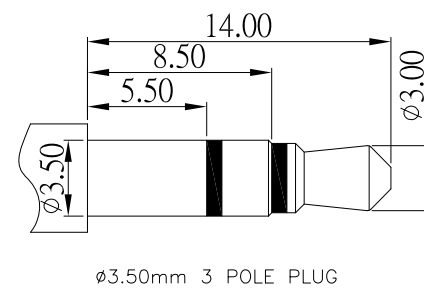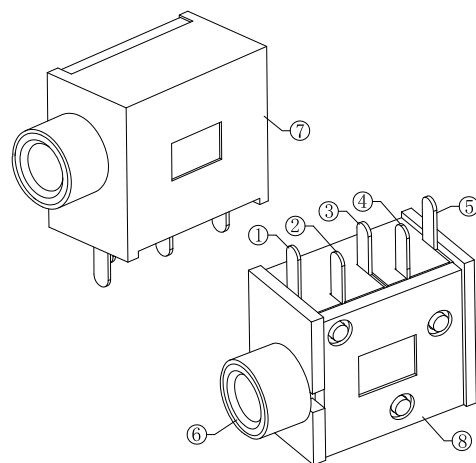

3.50mm 3 POLE PLUG

8	COVER	1	PBT	
7	HOUSING	1	PBT	
6	AXIS SUPPORT	1	BRASS	Ni-Plating
5	CURVE PIECE	1	BRASS	Sn-Plating
4	SPRING PIECE	1	PHOSPHOR BRONZE	Sn-Plating
3	CURVE PIECE	1	BRASS	Sn-Plating
2	SPRING PIECE	1	PHOSPHOR BRONZE	Sn-Plating
1	FLAT PIECE	1	BRASS	Sn-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

DRAWN BY:	DATE	MATL	TITLE	JACK
Jack Lu	10/31/23			
CHECKED BY:	DATE	FINISH	MODLE	PHONE JACK
Jacky Chen	10/31/23			
APPROVED BY:	DATE	SCALE	DWG NO.	PJ-364x-x-S124
Tony Kao	10/31/23	1 : 1	PART NO.	PJ-364x-x-S124
		SHEET NO.	1 of 1	
				SIZE A4
				VER R1

CONTACT

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

ITEM NO.	DESCRIPTION	DRAWN	DATE
1	更新plug尺寸	Jack	103123