


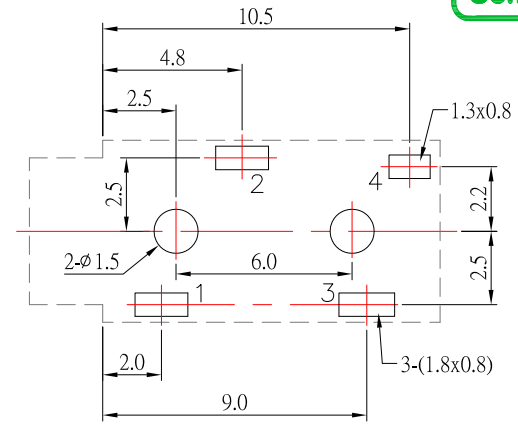
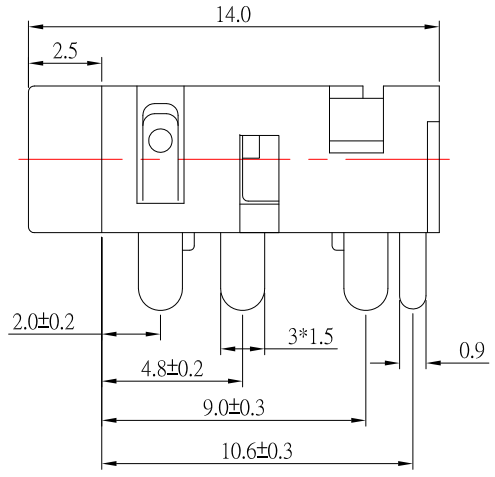
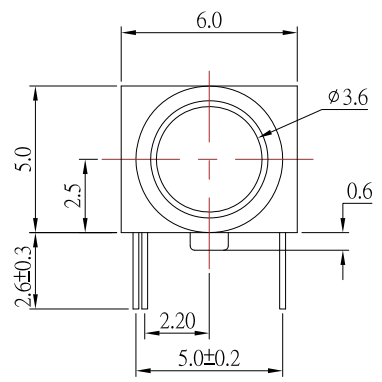


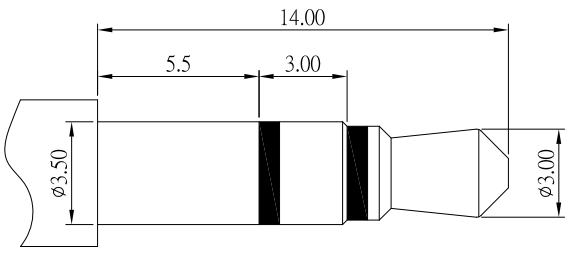

P.C.B LAYOUT
TOP VIEW

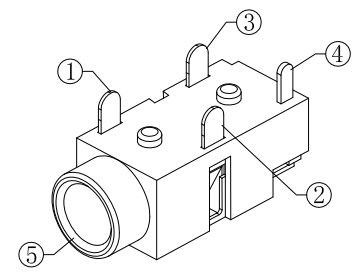


3.50mm 3 POLE PLUG

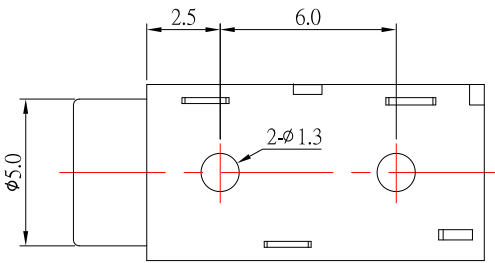

- SPECIFICATION**
- 1.Rating : DC 30V 0.5A ;
 - 2.Contact resistance : ≤ 30mΩ ;
 - 3.Insulation resistance : ≥ 100MΩ ;
 - 4.Withstand voltage : 500VAC ;
 - 5.Insertion and extraction force : 3-20N
 - 6.life test : 5,000 cycles °

SCHEMATIC

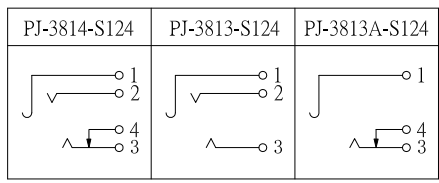

⑤	HOUSING	1	PA9T	
④	CURVE PIECE	1	BRASS	Ag-Plating
③	SPRING PIECE	1	PHOSPHOR BRONZE	Ag-Plating
②	CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
①	CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

4	更新尺寸及新增尺寸	Jack	071520
3	更新樣式	Jack	032619
2	更新尺寸及材質	Jack	072717
1	更新尺寸及更新為A0版	Jack	042817
ITEM NO.	DESCRIPTION	DRAWN	DATE



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3°	3RD. ANGEL'S	UNITS	MM
-------------------------------------	--	--------------	-------	----

DRAWN BY:	DATE	MATL	TITLE	JACK
Jack Lu	07/15/20			
CHECKED BY:	DATE	FINISH	MODLE	PHONE JACK
Jacky Chen	07/15/20			
APPROVED BY:	DATE	SCALE	DWG NO.	PJ-381x-S124
Tony Kao	07/15/20	1 : 1		
		SHEET NO.	PART NO.	PJ-381x-S124
				SIZE A4
				VER R4