

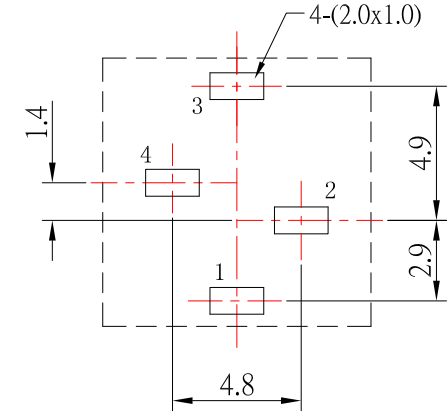
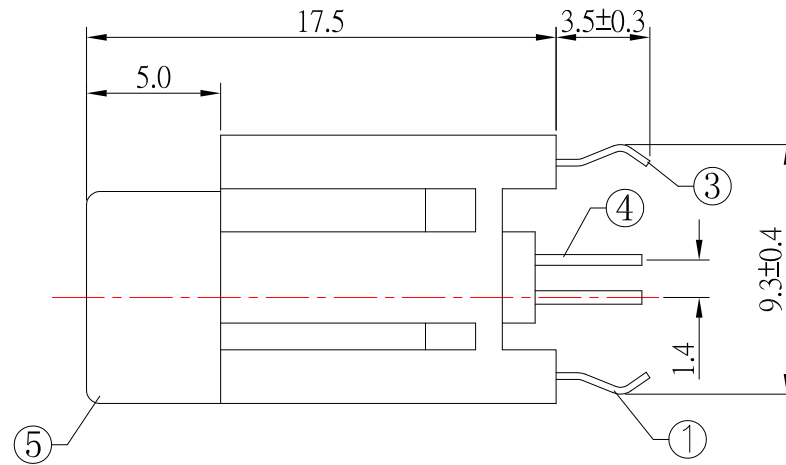


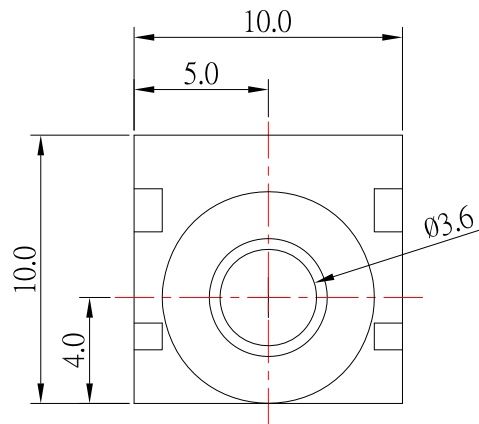

P.C.B LAYOUT
TOP VIEW



SCHEMATIC

PJ-D3042	PJ-D3042-1	PJ-D3042-2

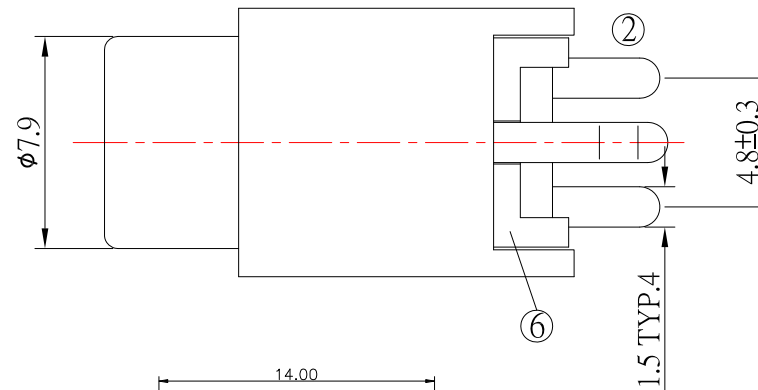

SPECIFICATION

- Rating : DC 30V 0.5A ;
- Contact resistance : $\leq 30m\Omega$;
- Insulation resistance : $\geq 100M\Omega$;
- Withstand voltage : 500VAC ;
- Insertion and extraction force : 3-20N;
- life test : 5,000 cycles °

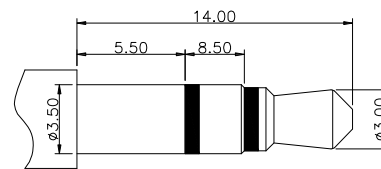

Ø3.50mm 3 POLE PLUG

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
6	COVER	1	PBT	
5	HOUSING	1	PBT	
4	FLAT PIECE	1	BRASS	Ag-Plating
3	SPRING PIECE	1	PHOSPHOR BRONZE	Ag-Plating
2	FLAT PIECE	1	BRASS	Ag-Plating
1	CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating

CONTACT

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	06/06/17			
CHECKED BY:	DATE	FINISH	MODLE	TACT SWITCH
Jacky Chen	06/06/17			
APPROVED BY:	DATE	SCALE	DWG NO.	PJ-D3042-x-S124
Tony Kao	06/06/17	1 : 1		
SHEET NO.	1 of 1	PART NO.	PJ-D3042-x-S124	SIZE
				A4
				VER
				R1

ITEM NO.	DESCRIPTION	DRAWN	DATE
1	更新尺寸	Jack	060617