

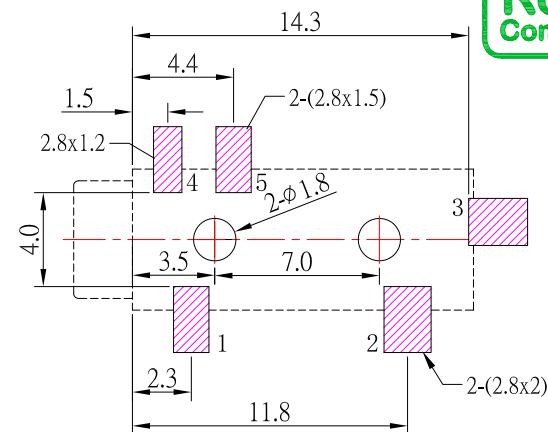
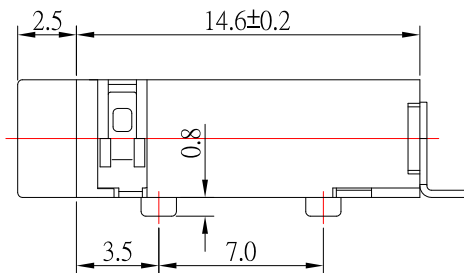
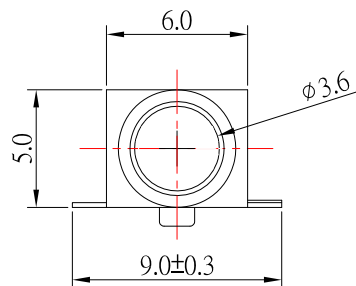


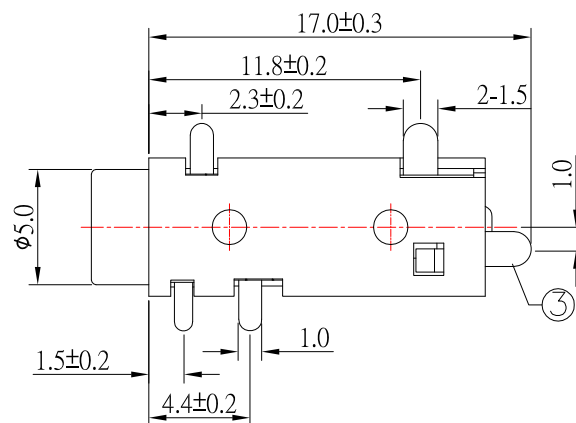


P.C.B LAYOUT
TOP VIEW

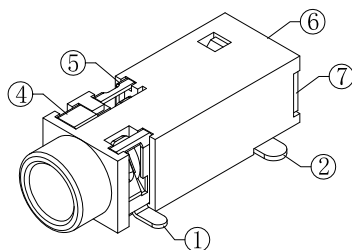

SCHEMATIC

SPECIFICATIONS:

- 1.Rating : DC 30V , 1.0A ;
- 2.Contact Resistance : $\leq 30m\Omega$ Max;
- 3.Insulation Resistance : $\geq 100M\Omega$ Min ;
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-20N
- 6.Life test : 5,000 cycles

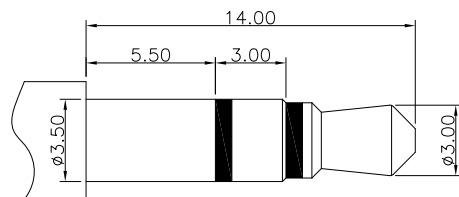

3.50mm 3 POLE PLUG

PJ-3695	PJ-3694B	PJ-3694A	PJ-3693

7	COVING	1	PA9T	
6	HOUSING	1	PA9T	
5	#5 CONTACT FOOT	1	SUS	Ag-Plating
4	#4 CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
3	#3 CONTACT FOOT	1	BRASS	Ag-Plating
2	#2 CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
1	#1 CONTACT FOOT	1	SUS	Ag-Plating
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	08/18/21		MODLE	3.5mm PHONE JACK
CHECKED BY:	DATE	FINISH		
Jacky Chen	08/18/21	SCALE	1 : 1	DWG NO, PJ-369x-S124
APPROVED BY:	DATE	SHEET NO.	1 of 1	PART NO, PJ-369x-S124
Tony Kao	08/18/21			

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3°	3RD. ANGEL'S	UNITS	MM
-------------------------------------	--	--------------	-------	----

ITEM NO	DESCRIPTION	DRAWN	DATE
4	更新樣式	Jack	081821
3	更新尺寸	Jack	100119
2	更新圖面	Jack	032719
1	更新為A0版	Jack	032317