
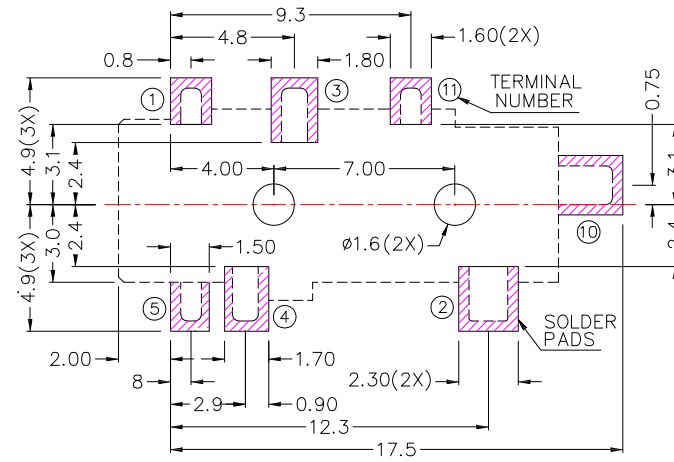
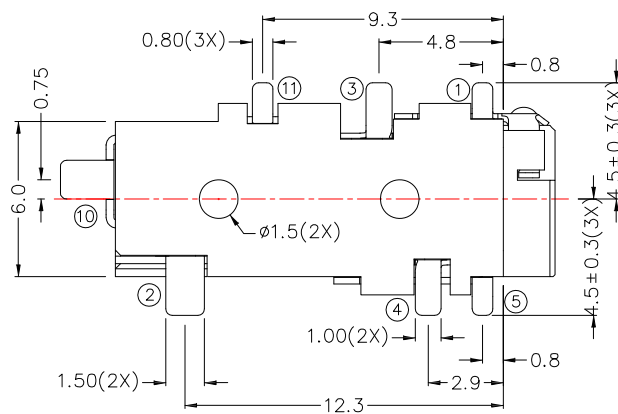



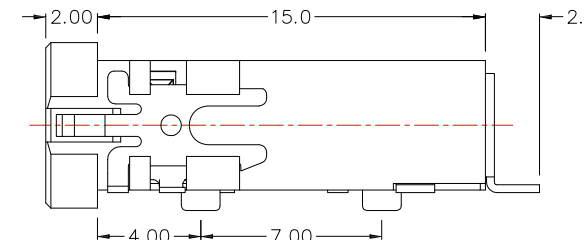



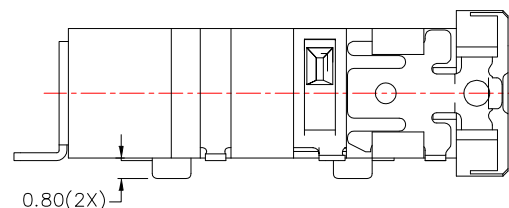

RECOMMENDED
SOLDER PAD LAYOUT
(TOP VIEW)

*MATERIAL

- TERMINAL 1 :PHOSPHOR BRONZE
- TERMINAL 2 :PHOSPHOR BRONZE
- TERMINAL 3 :PHOSPHOR BRONZE
- TERMINAL 4 :PHOSPHOR BRONZE
- TERMINAL 5 :PHOSPHOR BRONZE
- TERMINAL 10 :BRASS
- TERMINAL 11 :BRASS
- HOUSING : PA6T

SPECIFICATION

- Rating :DC 12V 1.0A
- Contact resistance : ≤50m Ω
- Insulation resistance : ≥100M Ω
- Withstand voltage : 500VAC
- Insertion and extraction force : 3-30N
- life test : 5,000 cycles

MODEL NO.	PJ-3827D	PJ-3825D
SCHEMATIC		