

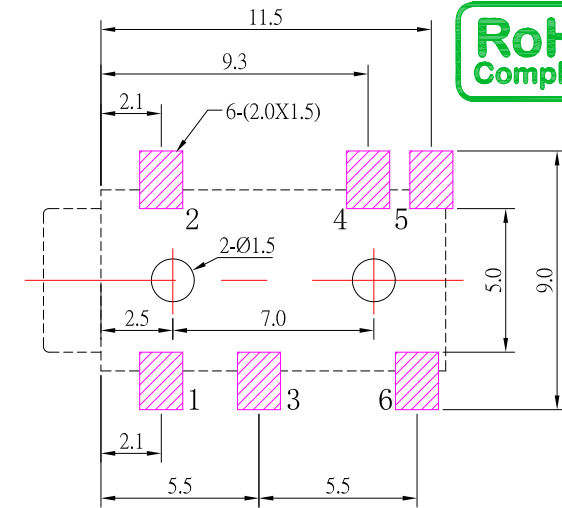
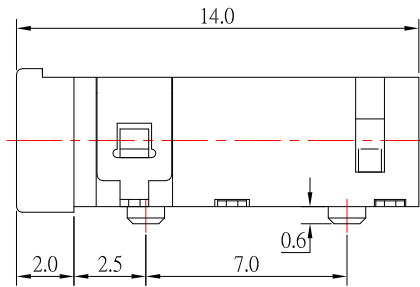
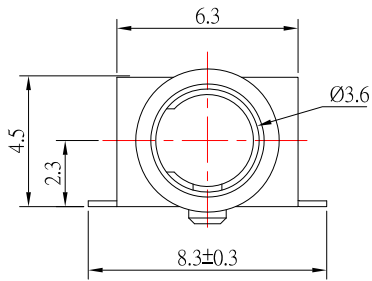
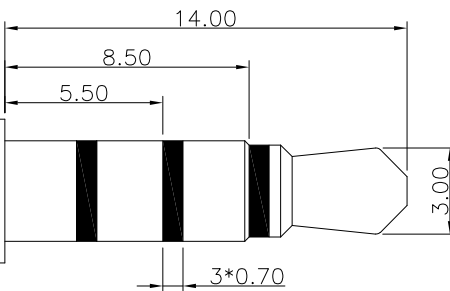





P.C.B LAYOUT
TOP VIEW

SCHEMATIC

PJ-3896D	PJ-3893AD	PJ-3893D	PJ-3894D



Ø3.50mm 4 POLE PLUG

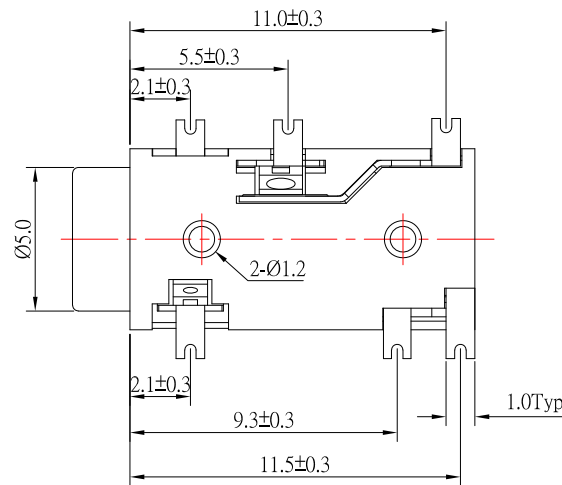

SPECIFICATION

1. Rating : DC 30V 0.5A
2. Contact resistance : $\leq 30\text{m}\Omega$
3. Insulation resistance : $\geq 100\text{M}\Omega$
4. Withstand voltage : 500VAC
5. Insertion and extraction force : 3-30N
6. life test : 5,000 cycles °

7	HOUSING	1	PA9T	
6	6# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
5	5# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
4	4# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
3	3# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
2	2# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
1	1# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

ITEM NO.	DESCRIPTION	DRAWN	DATE
4	更新尺寸公差	Jack	091625
3	更新材質和SCHEMATIC選擇	Jack	041122
2	新增插入示意圖	Jack	060817
1	更新為A0版	Jack	031317

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.5°

3RD. ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	09/16/25	FINISH	MODLE	PHONE JACK
CHECKED BY:	DATE	SCALE	DWG NO.	PJ-389xD-S124
Jacky Chen	09/16/25	1 : 1	PART NO.	PJ-389xD-S124
APPROVED BY:	DATE	SHEET NO.	1 of 1	
Tony Kao	09/16/25			