


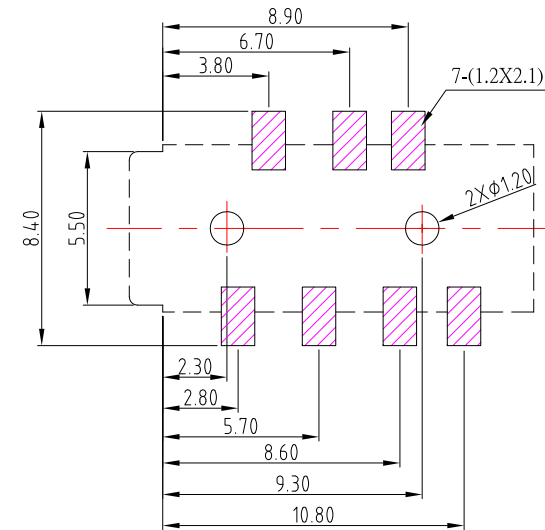
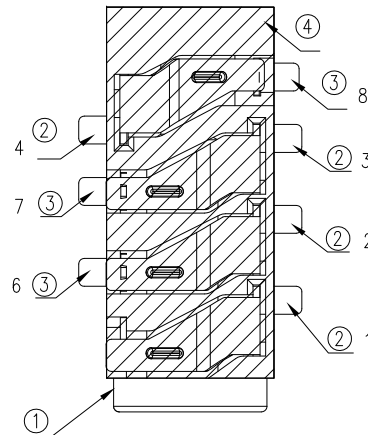
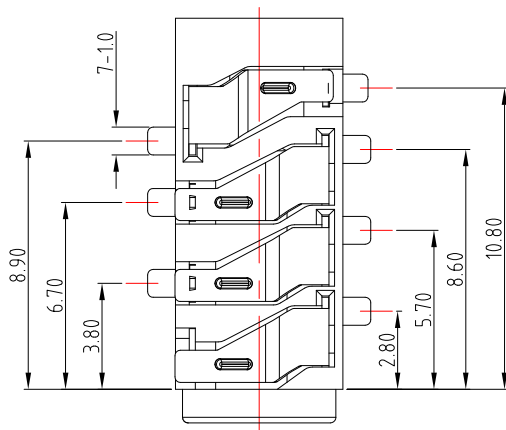


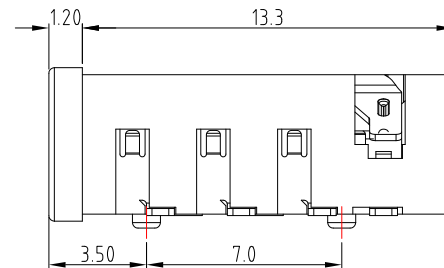

P.C.B LAYOUT
TOP VIEW



Model No.	PJ-3917D-S214
Schematic code	

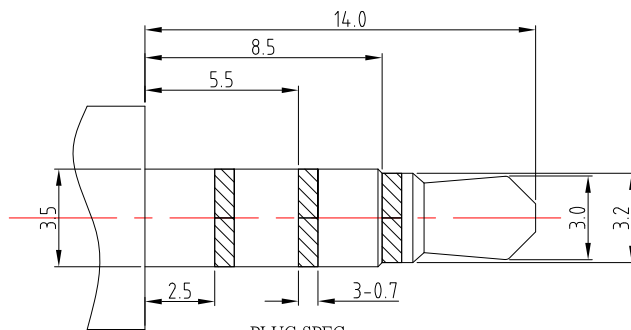

PLUG SPEC

NOTES:

1. ELECTRICAL CHARACTERISTICS:

1-1 CONTACT RESISTANCE: 50mΩ MAX. (INITIAL)
100mΩ MAX. (FINAL)

1-2. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE.

1-3. INSULATION RESISTANCE: 100MΩ MIN. MEASURED BY 500V DC

2. MECHANICAL CHARACTERISTICS:

2-1. PLUG INSERTION FORCE : 0.3~3.0KGS .

2-2. PLUG WITHDRAWAL FORCE : 0.3~3.0KGS .

3. DURABILITY TEST: 5,000 CYCLES .

④	MYLAR			1
③	CONTACT 2	PHOSPHOR BRONZE	GOLD FLASH	3
②	CONTACT 1	PHOSPHOR BRONZE	GOLD FLASH	4
①	HOUSING	PA9T	BLACK	1
ITEM	DESCRIPTIONs	MATERIAL		Q'TY

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	04/23/20			
CHECKED BY:	DATE	FINISH	MODLE	PHONE JACK
Jacky Chen	04/23/20			
APPROVED BY:	DATE	SCALE	1 : 1	DWG NO. PJ-3917D-S214
Tony Kao	04/23/20	SHEET NO.	1 of 1	PART NO. PJ-3917D-S214
				SIZE A4
				VER R5



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3°	3RD. ANGEL'S	UNITS	MM
-------------------------------------	--	--------------	-------	----

ITEM NO	DESCRIPTION	DRAWN	DATE
5	更新圖面	Jack	042320
4	更新圖面	Jack	041420
3	更新尺寸	Jack	051618
2	更新料號	Jack	091416
1	新增電路選項	Jack	031016