
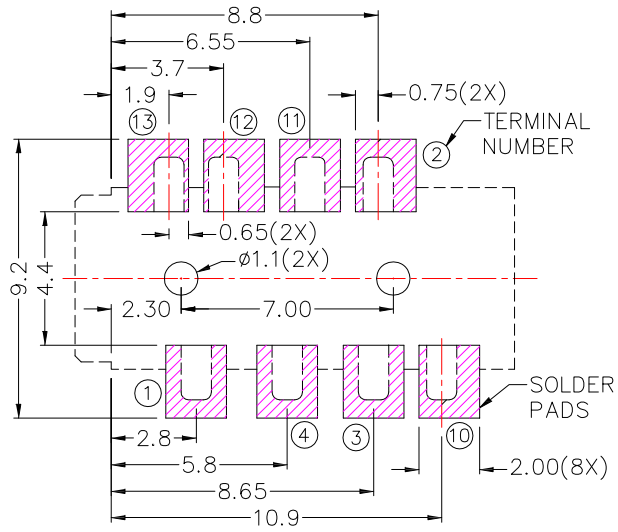


MODEL NO.	PJ-5108DS1
SCHMATIC	

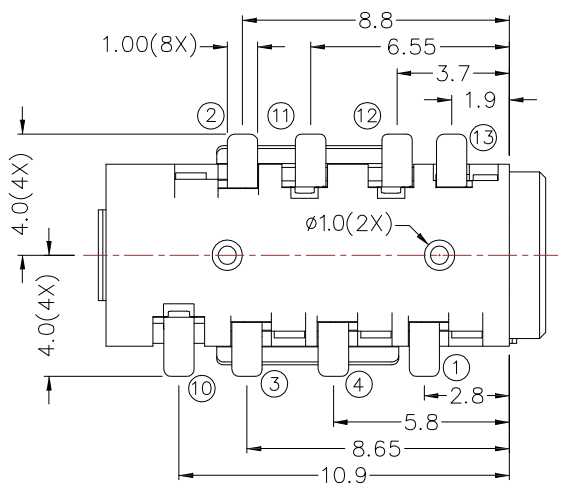

SPECIFICATION


- 1.Rating : DC 12V 1.0A
- 2.Contact resistance : $\leq 50m\Omega$
- 3.Insulation resistance : $\geq 100M\Omega$
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-30N
- 6.life test : 5,000 cycles

*** MATERIAL**

- TERMINAL 1 : PHOSPHOR BRONZE
- TERMINAL 2 : PHOSPHOR BRONZE
- TERMINAL 3 : PHOSPHOR BRONZE
- TERMINAL 4 : PHOSPHOR BRONZE
- TERMINAL 10 : PHOSPHOR BRONZE
- TERMINAL 11 : PHOSPHOR BRONZE
- TERMINAL 12 : PHOSPHOR BRONZE
- TERMINAL 13 : PHOSPHOR BRONZE
- SHIELD : STAINLESS STEEL
- HOUSING : PA10T

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED:
 Up to 5 ±0.2
 Above 5 ~ 15 ±0.3
 Above 15 ~ 30 ±0.4
 Above 30 ~ 50 ±0.5
 Angle ±0.3



DRAWN BY: Jack Lu
 CHECKED BY: Jacky Chen
 APPROVED BY: Tony Kao

DATE: 08/13/19
 DATE: 08/13/19
 DATE: 08/13/19

MAT'L		TITLE	JACK
FINISH		MODLE	PHONE JACK
SCALE	1 : 1	DWG NO.	PJ-5108DS1
SHEET NO.	1 of 1	PART NO.	PJ-5108DS1

ITEM NO.	DESCRIPTION	DRAWN	DATE
2	更新材質	Jack	081319
1	新增SPEC	Jack	062916