
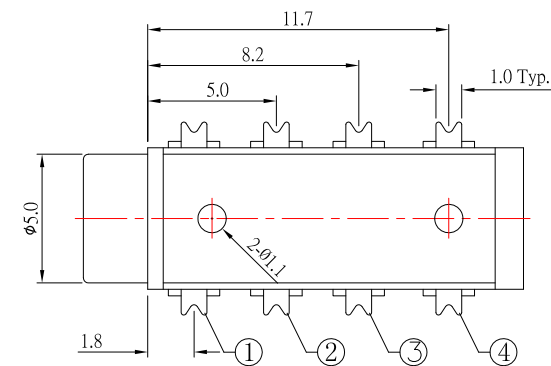
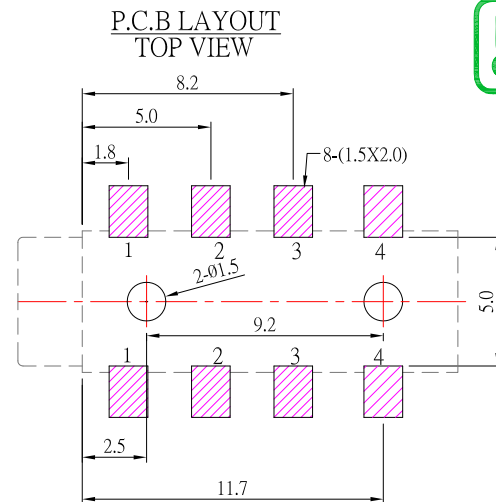
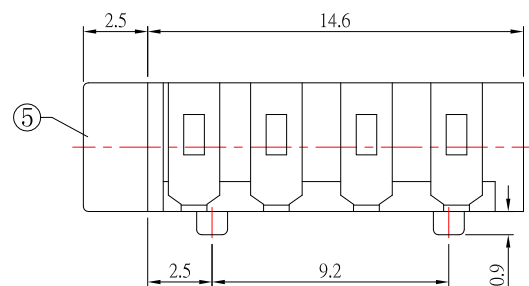



SCHEMATIC



SPECIFICATION

- 1.Rating : DC 30V 0.5A
- 2.Contact resistance : $\leq 50\text{m}\Omega$
- 3.Insulation resistance : $\geq 100\text{M}\Omega$ (DC250V)
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-20N
- 6.life test : 5,000 cycles

⑤	HOUSING	1	PA9T	
④	CONTACT FOOT #4	1	STAINLESS STEEL	Ag-Plating
③	CONTACT FOOT #3	1	STAINLESS STEEL	Ag-Plating
②	CONTACT FOOT #2	1	STAINLESS STEEL	Ag-Plating
①	CONTACT FOOT #1	1	STAINLESS STEEL	Ag-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3°	3RD. ANGEL'S	UNITS	MM
-------------------------------------	--	--------------	-------	----

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	04/15/14			
CHECKED BY:	DATE	FINISH	MODLE	PHONE JACK
Jacky Chen	04/15/14			
APPROVED BY:	DATE	SCALE	DWG NO.	PJ-S3013E-S125
Tony Kao	04/15/14	1 : 1		
		SHEET NO.	PART NO.	PJ-S3013E-S125
				SIZE A4
				VER R2

2	更新SPEC及材質	Jack	041514
1	更新圖面	Jack	112312
ITEM NO.	DESCRIPTION	DRAWN	DATE