



P.C.B LAYOUT
TOP VIEW

SCHEMATIC



SPECIFICATION

1. Rating : DC 30V, 0.5A ;
2. Contact resistance : $\leq 30m\Omega$;
3. Insulation resistance : $\geq 100M\Omega$;
4. Withstand voltage : 500VAC ;
5. Insertion and extraction force : 3-20N;
6. life test : 5,000 cycles ◦

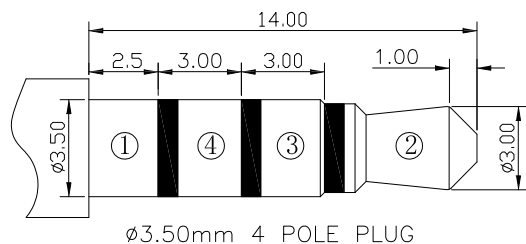

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
⑦	HOUSING	1	PPA	
⑥	6# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
⑤	5# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
④	4# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
③	3# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
②	2# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
①	1# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating

ITEM NO.	DESCRIPTION	DRAWN	DATE
5	新增PLUG標號	Jack	052819
4	更新圖面	Jack	052419
3	新增3上方圖	Jack	101918
2	更新圖面	Jack	092818
1	新增尺寸	Jack	070717

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED:
 Up to 5 ±0.2
 Above 5 ~ 15 ±0.3
 Above 15 ~ 30 ±0.4
 Above 30 ~ 50 ±0.5
 Angle ±0.3

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK	
Jack Lu	05/28/19				
CHECKED BY:	DATE	FINISH	MODLE	PHONE JACK	
Jacky Chen	05/28/19				
APPROVED BY:	DATE	SCALE	DWG NO.	PJ-S3118-x-S124	
Tony Kao	05/28/19	1 : 1			
SHEET NO.	1 of 1	PART NO.	PJ-S3118-x-S124	SIZE	A4
				VER	R5