
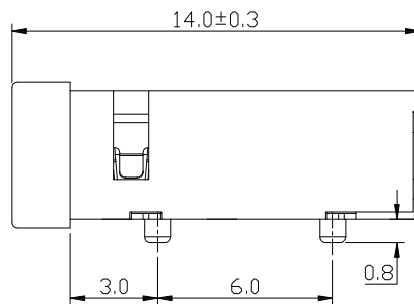
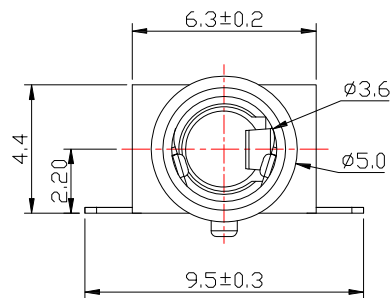
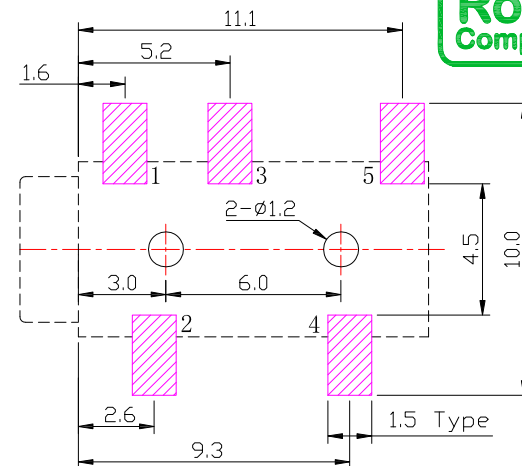
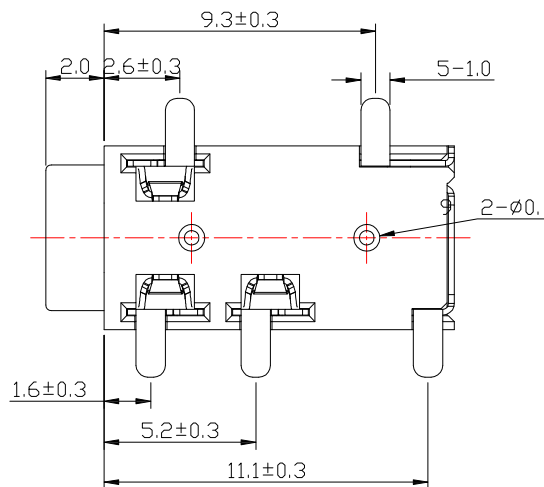


Ø3.50mm 3 POLE PLUG

SCHEMATIC



P.C.B LAYOUT TOP VIEW

SPECIFICATION

- 1.Rating : DC 30V, 1.0A ;
- 2.Contact resistance : $\leq 30m\Omega$;
- 3.Insulation resistance : $\geq 100M\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-30N;
- 6.life test : 5,000 cycles °

6	HOUSING	1	PA9T	
5	CONTACT FOOT#5	1	PHOSPHOR BRONZE	Au-Plating
4	CONTACT FOOT#4	1	PHOSPHOR BRONZE	Au-Plating
3	CONTACT FOOT#3	1	PHOSPHOR BRONZE	Au-Plating
2	CONTACT FOOT#2	1	PHOSPHOR BRONZE	Au-Plating
1	CONTACT FOOT#1	1	PHOSPHOR BRONZE	Au-Plating
No	PART NAME	QTY	MATERIAL	REMARK

DRAWN BY:	DATE	MATL	TITLE	JACK
Jack Lu	10/13/22			
CHECKED BY:	DATE	FINISH	MODLE	PHONE JACK
Jacky Chen	10/13/22			
APPROVED BY:	DATE	SCALE	DWG NO.	PJ-S3127-x-S124
Tony Kao	10/13/22	1 : 1		
		SHEET NO.	PART NO.	PJ-S3127-x-S124
				SIZE
				A4
				VER
				R3

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD. ANGEL'S

UNITS MM

3	更新圖面尺寸公差	Jack	101322
2	新增plug對應pin位置	Jack	083017
1	更新為A0版	Jack	052417
ITEM NO	DESCRIPTION	DRAWN	DATE