

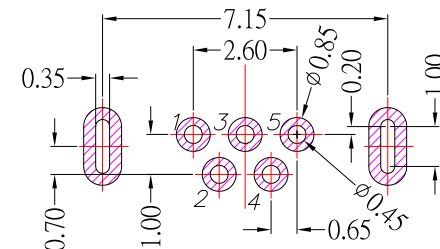
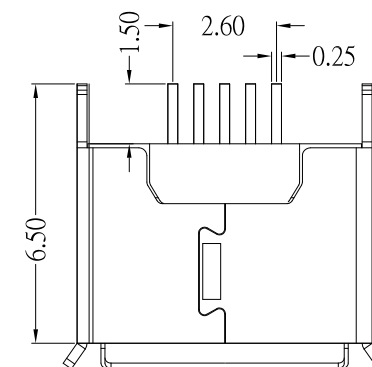


— 鍍層厚度：

Blank : 1u"
2 : 15u"
3 : 30u"

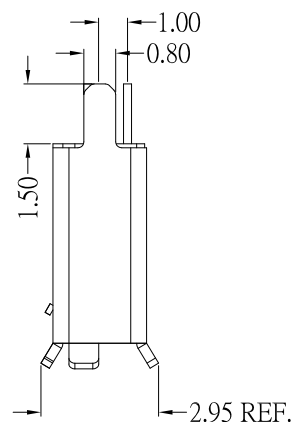


SECTION A-A

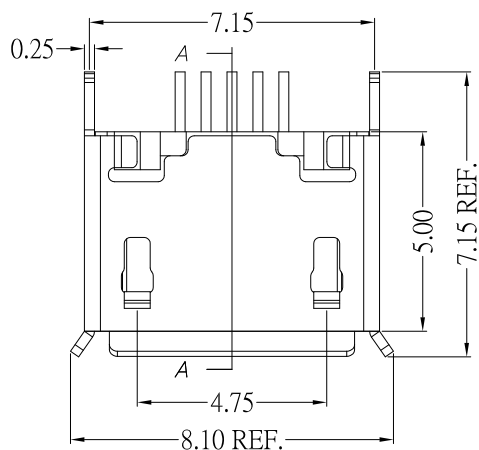

2.2 Shell: Nickel under Plated surface layer

3.7 TEMPERATURE RANGE: -30°C ~ +80°C

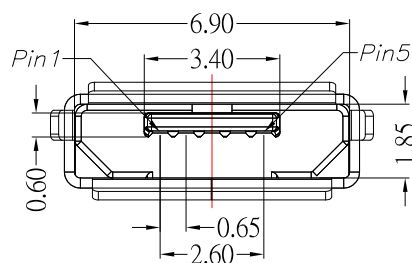

CONTACT

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5	± 0.2
Above 5 ~ 15	± 0.3
Above 15 ~ 30	± 0.4
Above 30 ~ 50	± 0.5
Angle	± 0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE
Jack Lu	01/06/22

CHECKED BY:	DATE
Jacky Chen	01/06/22

APPROVED BY:	DATE
Tony Kao	01/06/22

DATE _____

01/06/2

DATE _____

01/06/2

DATE _____

01/06/2

MAT'L

FINISH

[illegible]

SCALE

SHEET M

TITLE

MODLE

[illegible]

DWG NO	
--------	--

PART No.

CONNECTOR

MICRO USB 5PF ABTYPE 直立式 捲邊
圖 1.5

MPN/CFU 5.1E+01 30.15

MRUSB-JAB-V-X-3347

MRUSB-5AB-V-x-S347

	0171
--	------

SIZE
M

	VER
--	-----

	R2
--	----