

MRUSB-5B-D11x-S267


SHELL鍍層:


TN
NI






SECTION A-A

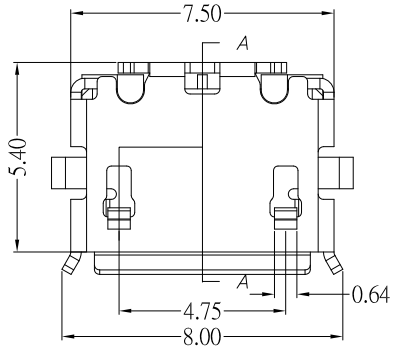





NOTES:

1.MATERIAL:

1.1 HOUSING: LCP,UL94V-0

1.2 CONTACT: PHOSPHOR BRONZE

1.3 SHELL: BRASS

2.Finish:

2.1 Contact: Plated Gold in Mating Area ;
Gold Plated on Solder Balls ;
Nickel under plated overall

2.2 SHELL: NICKEL or TIN UNDER PLATED SURFACE LAYER

3.SPECIFICATION:

3.1 CURRENT RATING: PIN1,5--- 1.2 A Max
PIN2,3,4--- 1.0 A Max

3.2 DIELECTRIC WITHSSTANDING VOLTAGE: 100 V(ac) FOR 1min

3.3 CONTACT RESISTANCE: 30 mΩ MAX.


3.4 INSULATION RESISTANCE: 100 MΩ MIN.


3.5 TOTAL MATING FORCE: 3.57 Kgf MAX.


3.6 TOTAL UNMATING FORCE: 1.0 Kgf MIN.

3.7 LIFE: 10,000 CYCLES

3.8 TEMPERATURE RANGE: -30°C ~ +80°C





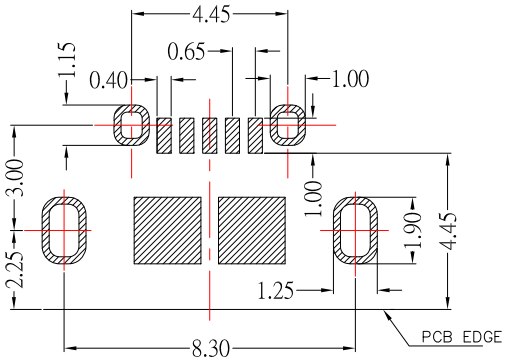

P.C.B LAYOUT MOUNTING PATTERN

ITEM NO.	DESCRIPTION	DRAWN	DATE
1	更新爲A0版	Jack	021015

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ±0.2; Above 5 ~ 15 ±0.3; Above 15 ~ 30 ±0.4; Above 30 ~ 50 ±0.5; Angle ±0.3°

3RD. ANGEL'S

UNITS MM

		DATE
DRAWN BY:	Jack Lu	02/10/15
CHECKED BY:	Jacky Chen	02/10/15
APPROVED BY:	Tony Kao	02/10/15

MAT'L		TITLE	CONNECTOR
FINISH		MODLE	MICRO USB 5S B TYPE 牛角型 PH: 4.45- 8.6mm
SCALE	1 : 1	DWG NO.	MRUSB-5B-D11x-S267
SHEET NO.	1 of 1	PART NO.	MRUSB-5B-D11x-S267

SIZE A4 VER A0