





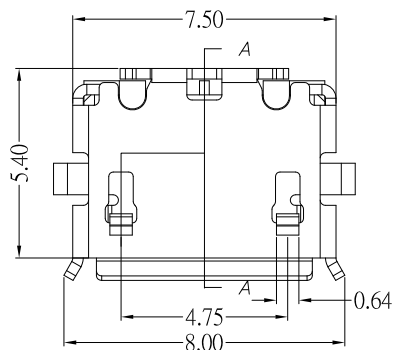

MRUSB-5B-D11x-S267

SHELL 鍍層:

TN
NI



NOTES:

1.MATERIAL:


- 1.1 HOUSING: LCP,UL94V-0
- 1.2 CONTACT: PHOSPHOR BRONZE
- 1.3 SHELL: BRASS

2.Finish:




- 2.1 Contact: Plated Gold in Mating Area ;
Gold Plated on Solder Balls ;
Nickel under plated overall
- 2.2 SHELL: NICKEL or TIN UNDER PLATED SURFACE LAYER

3.SPECIFICATION:

- 3.1 CURRENT RATING: PIN1,5--- 1.2 A Max
PIN2,3,4--- 1.0 A Max
- 3.2 DIELECTRIC WITHSTANDING VOLTAGE: 100 V(ac) FOR 1min
- 3.3 CONTACT RESISTANCE: 30 mΩ MAX.
- 3.4 INSULATION RESISTANCE: 100 MΩ MIN.
- 3.5 TOTAL MATING FORCE: 3.57 Kgf MAX.
- 3.6 TOTAL UNMATING FORCE: 1.0 Kgf MIN.
- 3.7 LIFE: 10,000 CYCLES
- 3.8 TEMPERATURE RANGE: -30°C ~ +80°C



SECTION A-A

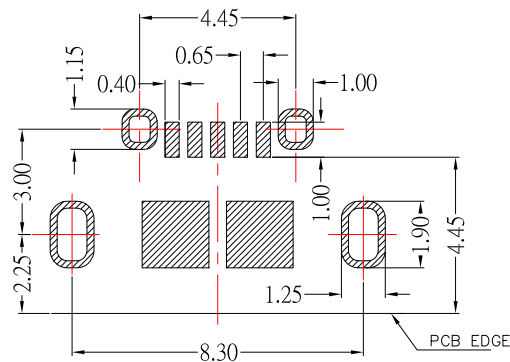

P.C.B LAYOUT MOUNTING PATTERN

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED:
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD. ANGEL'S



UNITS MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 02/10/15
DATE: 02/10/15
DATE: 02/10/15

MAT'L		TITLE	CONNECTOR
FINISH		MODLE	MICRO USB 5S B TYPE 牛角型
SCALE	1 : 1	DWG NO.	MRUSB-5B-D11x-S267
SHEET NO.	1 of 1	PART NO.	MRUSB-5B-D11x-S267

SIZE: A4
VER: A0

1	更新為A0版	Jack	021015
ITEM NO.	DESCRIPTION	DRAWN	DATE