MRUSB-5B-ED8x-S347

RoHS Compliant

SHELL鍍層:

TN
NI

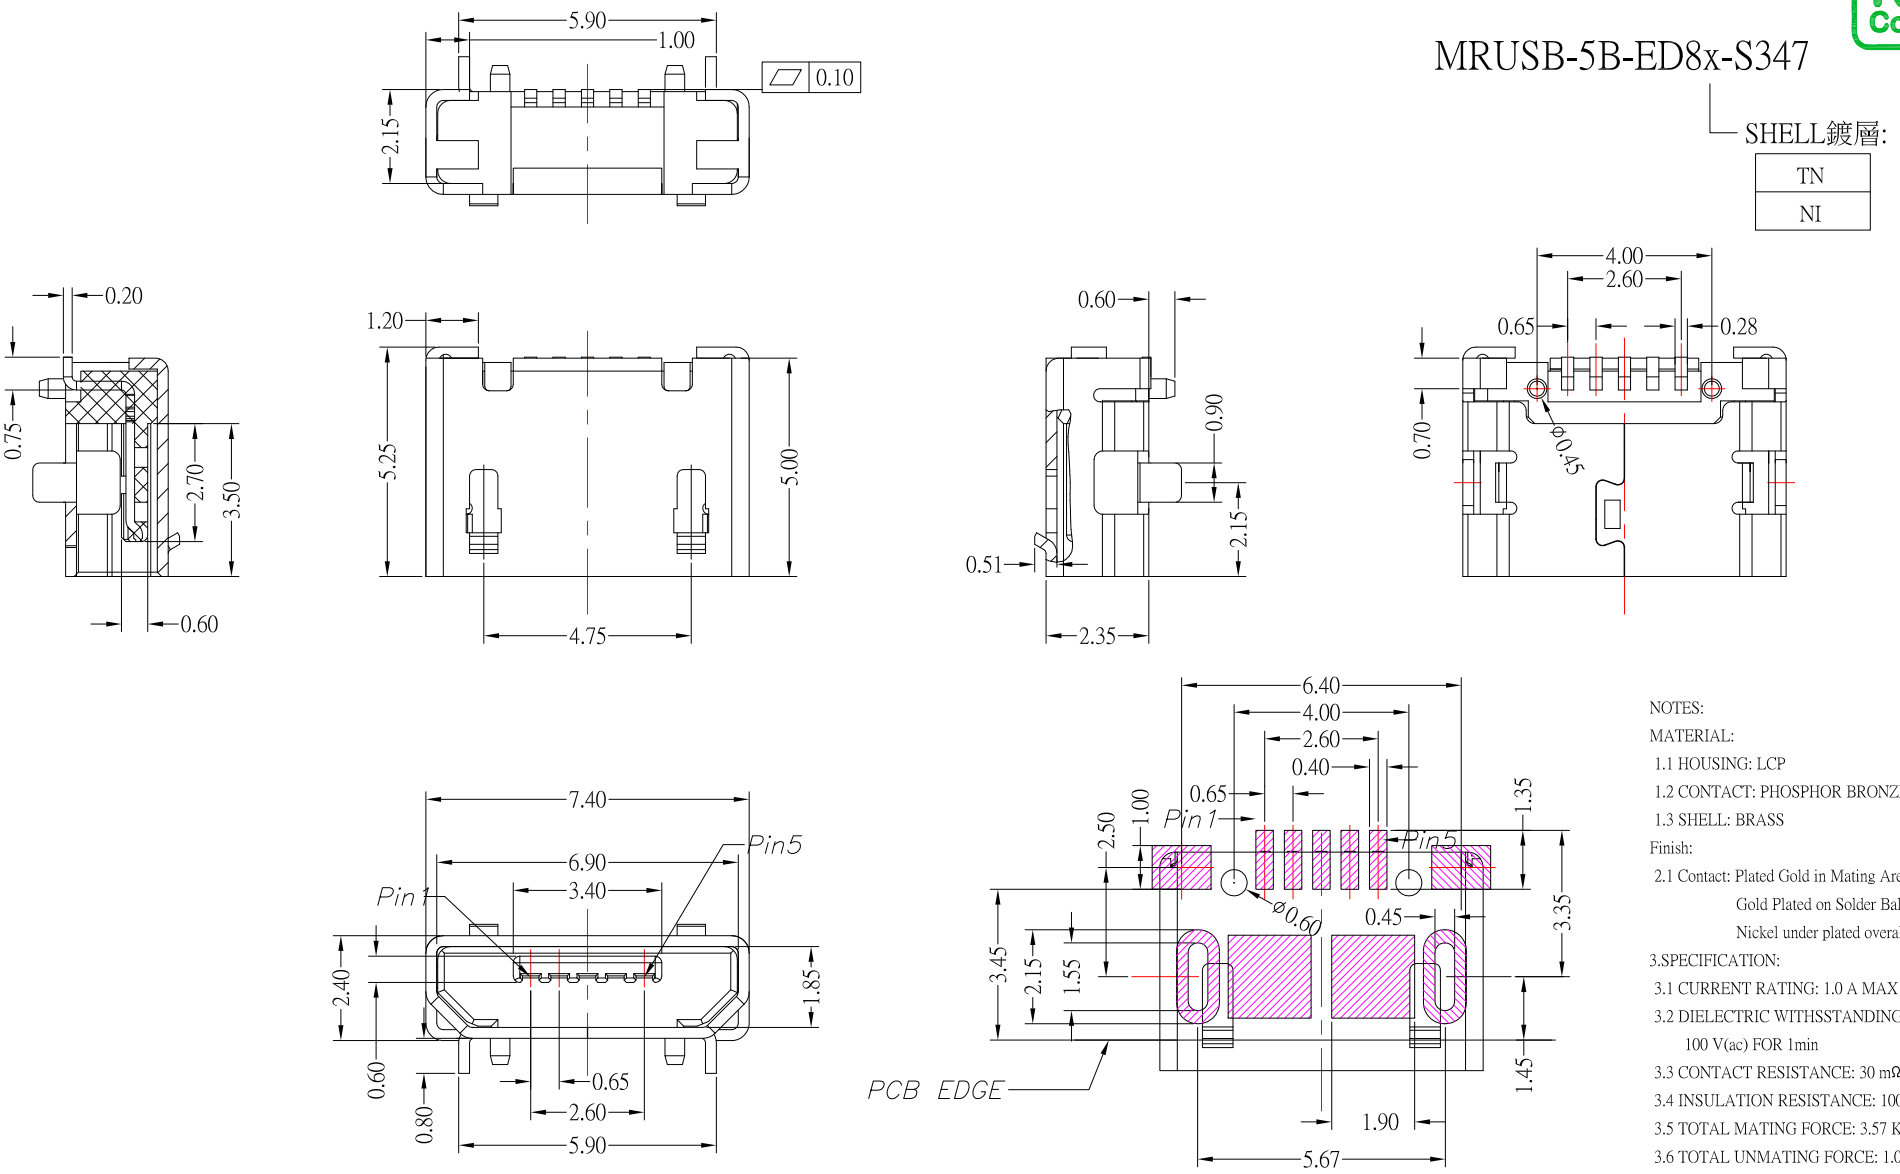

P.C.B LAYOUT MOUNTING PATTERN

NOTES:

MATERIAL:

1.1 HOUSING: LCP

1.2 CONTACT: PHOSPHOR BRONZE

1.3 SHELL: BRASS

Finish:

2.1 Contact: Plated Gold in Mating Area ;
Gold Plated on Solder Balls
Nickel under plated overall

3.SPECIFICATION:

3.1 CURRENT RATING: 1.0 A MAX

3.2 DIELECTRIC WITHSSTANDING VOLTAGE:
100 V(ac) FOR 1min

3.3 CONTACT RESISTANCE: 30 mΩ MAX.

3.4 INSULATION RESISTANCE: 100 MΩ MIN.

3.5 TOTAL MATING FORCE: 3.57 Kgf MAX.

3.6 TOTAL UNMATING FORCE: 1.0 Kgf MIN.

3.7 LIFE: 5,000 CYCLES

3.8 TEMPERATURE RANGE: -30°C ~ +80°C

ITEM NO.	DESCRIPTION	DRAWN	DATE
6	新增尺寸	Jack	071320
5	更新PCB LAYOUT尺寸	Jack	121119
4	更新樣式	Lan	041519
3	新增PCB LAYOUT尺寸	Jack	112317
2	更新端子長度	Jack	060617
1	新增PCB LAYOUT尺寸	Jack	020317

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle ± 0.3°

3RD. ANGEL'S | UNITS | MM

		DATE
DRAWN BY:	Jack Lu	07/13/20
CHECKED BY:	Jacky Chen	07/13/20
APPROVED BY:	Tony Kao	07/13/20

MAT'L		TITLE	CONNECTOR
FINISH		MODLE	MICRO USB B TYPE 前插5.67 後貼 有柱 平口
SCALE	1 : 1	DWG NO.	MRUSB-5B-ED8x-S347
SHEET NO.	1 of 1	PART NO.	MRUSB-5B-ED8x-S347

SIZE A4 | VER R6