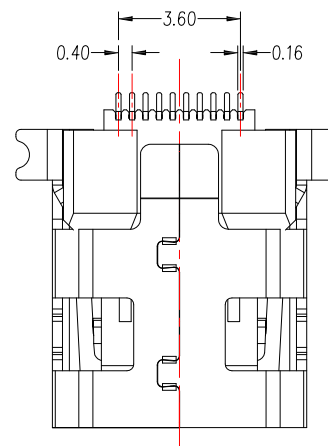

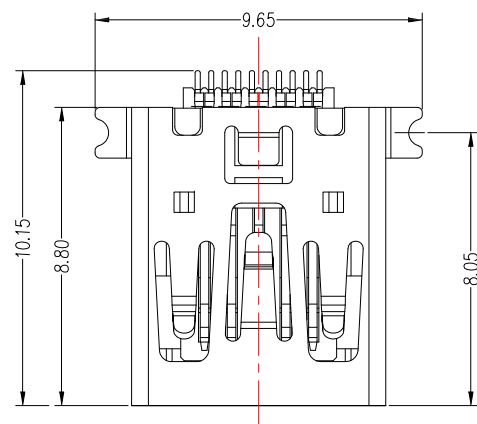


Electrical:



- 1.Current Rating: 0.5 Amperes
- 2.Contact Resistance: 50 mΩ Max
- 3.Dielectric Withstanding Voltage: AC 100 V
- 4.Insulation Resistance: 100 MΩ Min
- 5.Operating Temperature: -25°C ~ 65°C

Material:

- 1.Housing: High Temperature Thermal Plastics,UL 94V-0
- 2.Contact: Phosphor Bronze
- 3.Shell: Phosphor Bronze

Finish:

- 1.Contact: Plated Gold in Mating Area ;  
Tin Plated on Solder Balls ;  
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

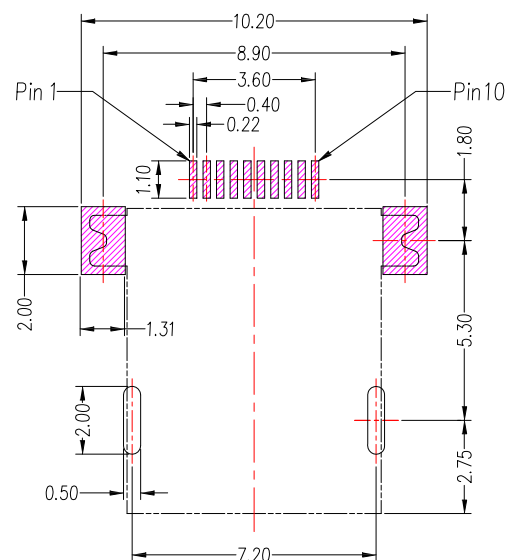

### P.C.B LAYOUT MOUNTING PATTERN

[illegible]