



SUA-110ECx-x-S236

Shell Material :

Blank : BRASS

I : SPCC

Color :

White : W

Black : B

SPECIFICATIONS

Electrical:





- 1.Voltage Current Rating: 1.5 AMP, 30VAC
- 2.Contact Resistance: 30 mΩ Max
- 3.Insulation Resistance: 1,000 MΩ Min
- 4.Dielectric Withstanding Voltage: 500 V AC
- 5.Operating Temperature: -35°C ~ 85°C

Material:

- 1.Housing: PBT
- 2.Contact: Phosphor Bronze
- 3.Shell: Brass / Spcc

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

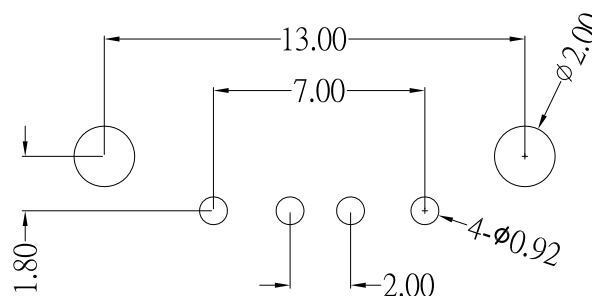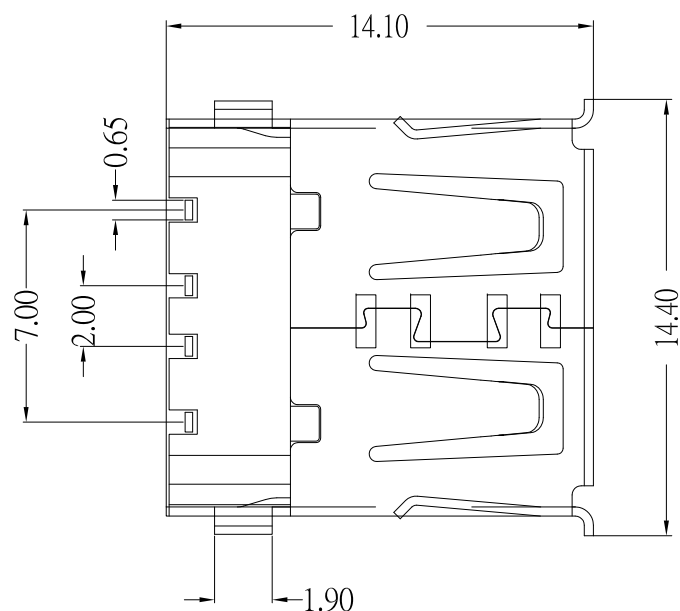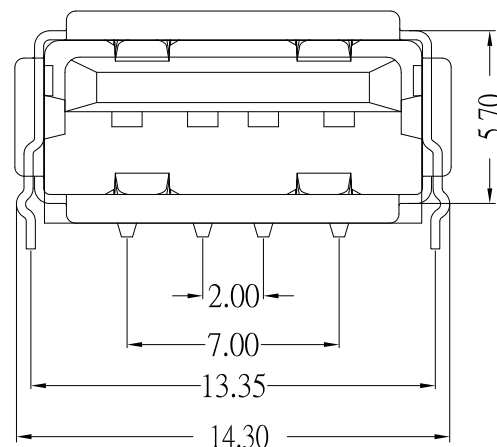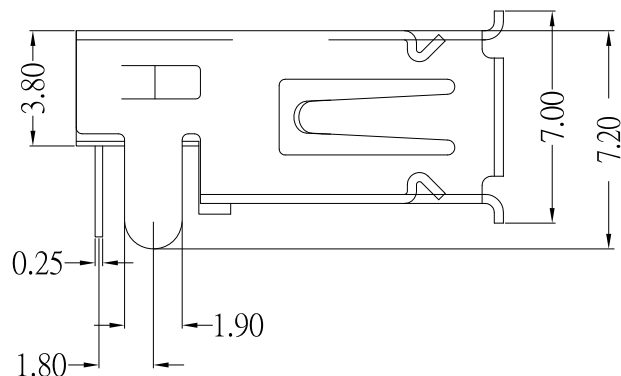

RECOMMENDED P.C.B LAYOUT



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: DATE

Jack Lu 06/30/20

CHECKED BY: DATE

Jacky Chen 06/30/20

APPROVED BY: DATE

Tony Kao 06/30/20

MATL

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

CONNECTOR

USB A/F 沉板H: 3.8mm 有捲邊 腳距1.80

SUA-110ECx-x-S236

SUA-110ECx-x-S236

SIZE

A4

VER

R1

ITEM NO

DESCRIPTION

DRAWN

DATE

Jack

063020

1

更新樣式

Jack

063020