








SUA-110H15-x-S235

COLOR :

Black: B

White : W

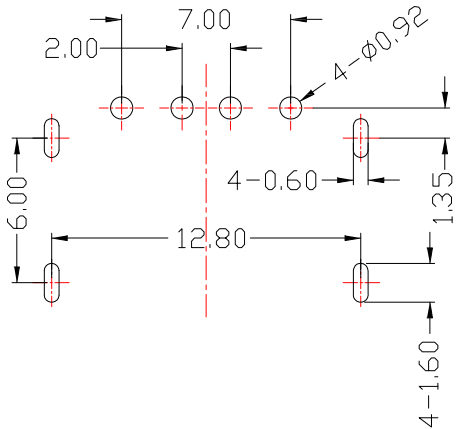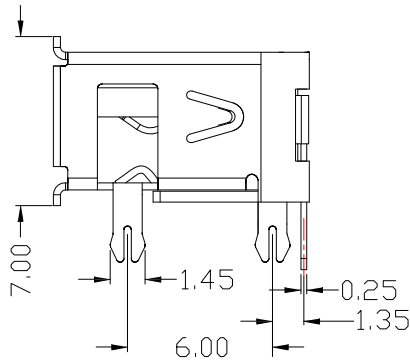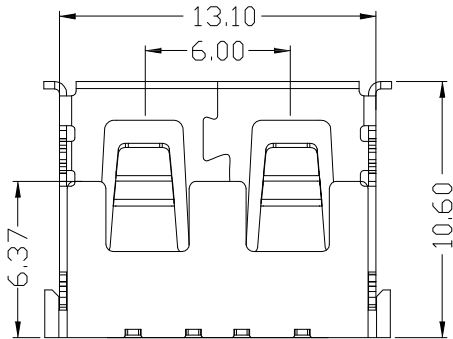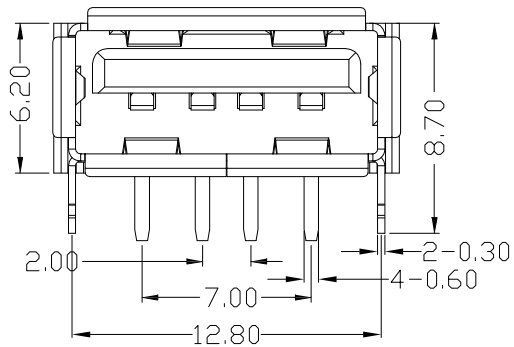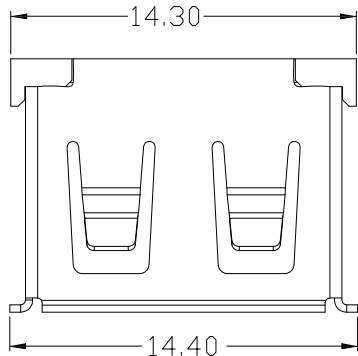

P.C.B LAYOUT MOUNTING PATTERN

SPECIFICATIONS

Electrical:

- 1.Contact Resistance: 30 mΩ Max
- 2.Dielectric Withstanding Voltage: 500 V AC FOR 1 MIN
- 3.Insulation Resistance: 1,000 MΩ Min
- 4.Operating Temperature: -55°C ~ 85°C

Mechanical:

- 1.Connector Mate and Unmate Force
 - Mate force: 3.57 kgf (Max)
 - Unmate force: 1.02 kgf (Min)

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle ± 0.3°
3RD. ANGEL'S
UNITS MM

DRAWN BY:	DATE	MAT'L		TITLE	CONNECTOR
Jack Lu	08/18/15	FINISH		MODLE	USB AF DIP 10.6MM四腳有邊H=6.2
CHECKED BY:	DATE	SCALE	1 : 1	DWG NO.	SUA-110H15-x-S235
Jacky Chen	08/18/15	SHEET NO.	1 of 1	PART NO.	SUA-110H15-x-S235
APPROVED BY:	DATE				
Tony Kao	08/18/15				