



SUA-110PCxx-x-S175

SHELL :

COLOR :

Blank : BRASS
I : SPCC

Black: B
White : W

鍍層厚度 :







Blank : 1u"
2 : 15u"
3 : 30u"

SPECIFICATIONS

- Electrical:
- 1.Current Rating: 1.5A / contact terminal
 - 2.Voltage Rating: 30 VDC
 - 3.Contact Resistance: 30 mΩ Max
 - 4.Dielectric Withstanding Voltage: 500 V AC AT Sec Level
 - 5.Insulation Resistance: 1,000 MΩ Min

Material:

- 1.Housing: PBT,UL94V-0
 - 2.Contact: Brass
 - 3.Shell: Spcc / Brass
- Finish:
- 1.Contact: Plated Gold in Mating Area;
Tin on Solder Balls
Nickel under plated overall
 - 2.Shell: Nickel Plating

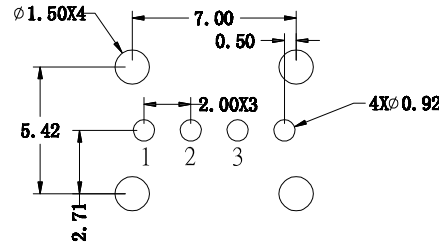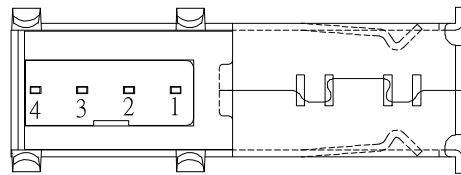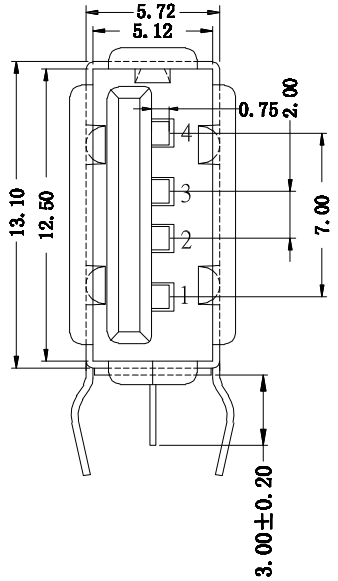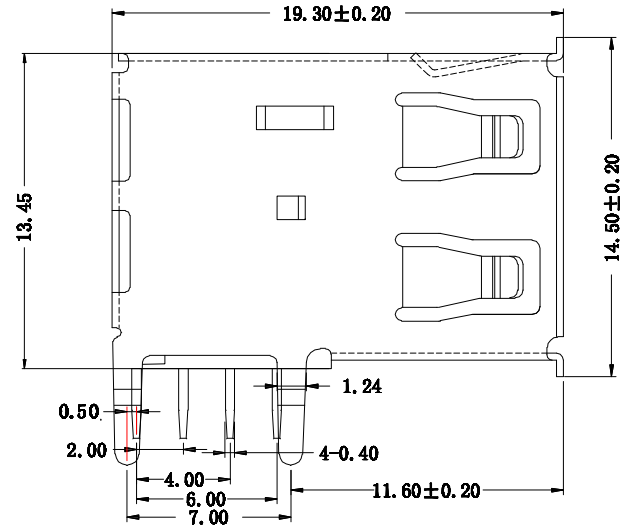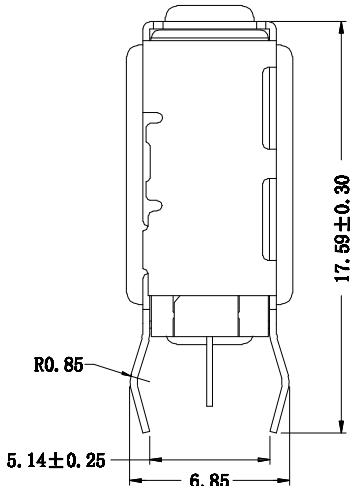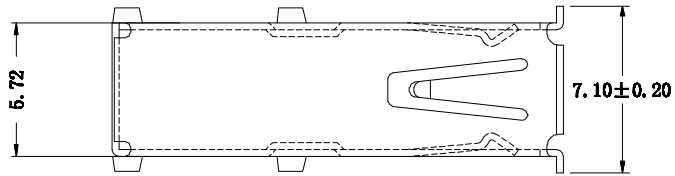

P.C.B LAYOUT MOUNTING PATTERN

				CONTACT 建倚科技股份有限公司 CONTACT TECHNOLOGY CORP.					DRAWN BY: DATE		MAT'L		TITLE		CONNECTOR										
5	更新尺寸標示	Jack	122324						Jack Lu	12/23/24															
4	新增UL94V-0	Jack	062221	TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ± 0.2 Above 5 ~ 15 ± 0.3 Above 15 ~ 30 ± 0.4 Above 30 ~ 50 ± 0.5 Angle ± 0.3° 3RD. ANGEL'S  UNITS MM					CHECKED BY: DATE		FINISH		MODLE		USB AF 側插 90度 有後蓋 自動機(UL94V-0)										
3	新增尺寸	Jack	041620						Jacky Chen	12/23/24															
2	新增PIN編號	Jack	062918											APPROVED BY: DATE		SCALE		1 : 1		DWG NO.		SUA-110PCxx-x-S175		SIZE	
1	新增外殼材質選項	Jack	053018											Tony Kao										12/23/24	A4
ITEM NO.	DESCRIPTION	DRAWN	DATE						SHEET NO.		1 of 1		PART NO.		SUA-110PCxx-x-S175		VER								
																	R5								