





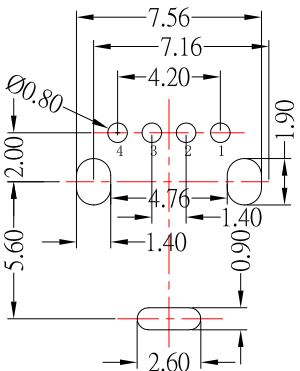


SUA-110P3x-x-S236

SHELL :	COLOR :
Blank : Brass	Black: B
I : SPCC	White : W

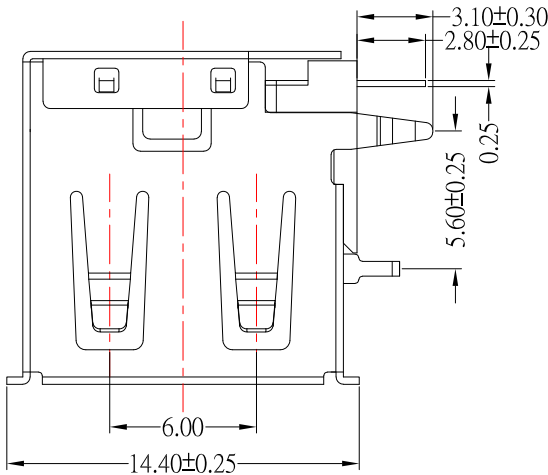

PCB LAYOUT

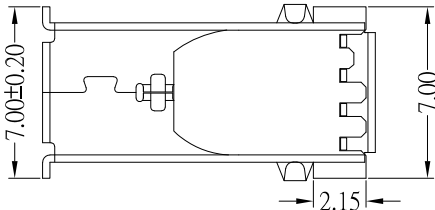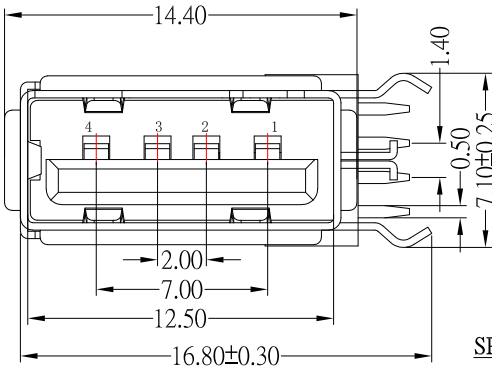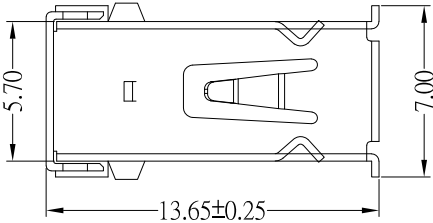

SPECIFICATIONS

Electrical:

- 1.Rated Voltage: 30V
- 2.Rated Current: 1.5 A
- 3.Dielectric Withstanding Voltage: AC 500 V / 1MIN
- 4.Insulation Resistance: 1000 MΩ Min
- 5.Contact Resistance: 30 mΩ Max

Material:

Material:

- 1.Housing: PBT
- 2.Contact: Brass
- 3.Shell: Brass / SPCC

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

Pin NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND

5	更新圖面	Jack	111124
4	更新材質	Jack	032922
3	新增尺寸及更新PIN編碼及更新SPEC	Jack	040120
2	新增尺寸	Jack	072519
1	新增尺寸	Jack	050319
ITEM NO.	DESCRIPTION	DRAWN	DATE



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3	3RD. ANGEL'S		UNITS	MM
-------------------------------------	---	--------------	--	-------	----

DRAWN BY:	DATE	MAT'L		TITLE	CONNECTOR
Jack Lu	11/11/24	FINISH		MODLE	USB AF側插短體Y型腳有卷邊 L=13.6
CHECKED BY:	DATE	SCALE	1 : 1	DWG NO.	SUA-110P3x-x-S236
Jacky Chen	11/11/24	SHEET NO.	1 of 1	PART NO.	SUA-110P3x-x-S236
APPROVED BY:	DATE				
Tony Kao	11/11/24				