



SUA-210H-x-S175

|           |
|-----------|
| Color     |
| White : W |
| Black : B |





NOTE:

1.MATERIAL:

- a.HOUSING:PBT GLASS FIBRE UL94 V-0 ;  
b.CONTACT: PHOSPHOR BRONZE ;  
(SURFACE PLATING: Au + Sn + Ni )  
c.SHEEL: SPCC ;  
(SURFACE PLATING: Cu / Ni)

2.ELECTRIC:

- a.CONTACT RESISTANCE: 30 MILLIOHMS MAX  
b.INSULATION RESISTANCE: 1,000 MEGA OHMS MIN  
c.DIELECTNIC VOLTAGE: 500V AC ONE MIN LEVEL  
d.OPERATING TEMPERATURE: -55°C~ 85°C

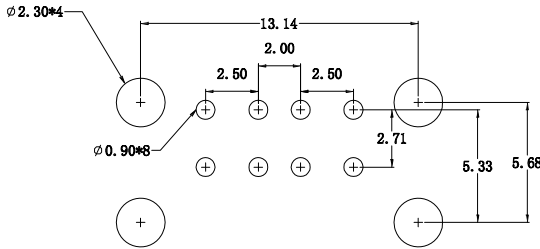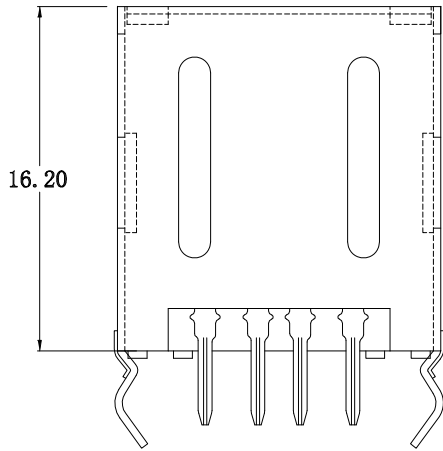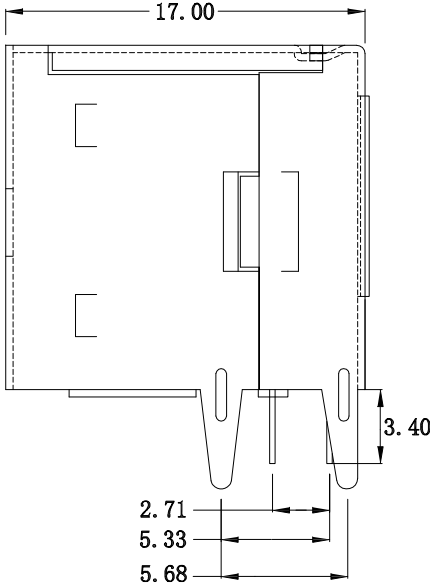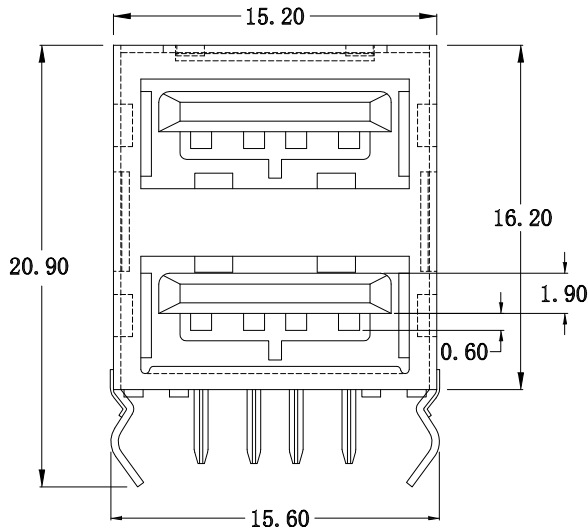

P.C.B LAYOUT MOUNTING PATTERN

**CONTACT** 建倚科技股份有限公司  
**CONTACT TECHNOLOGY CORP.**

TOLERANCE UNLESS  
OTHERWISE STATED :

Up to 5 ±0.2  
Above 5 ~ 15 ±0.3  
Above 15 ~ 30 ±0.4  
Above 30 ~ 50 ±0.5  
Angle ±0.3°

3RD.  
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu  
CHECKED BY: Jacky Chen  
APPROVED BY: Tony Kao

DATE  
10/11/12  
DATE  
10/11/12  
DATE  
10/11/12

|           |        |          |                 |
|-----------|--------|----------|-----------------|
| MAT'L     |        | TITLE    | CONNECTOR       |
| FINISH    |        | MODLE    | USB AF 雙層全包     |
| SCALE     | 1 : 1  | DWG NO.  | SUA-210H-x-S175 |
| SHEET NO. | 1 of 1 | PART NO. | SUA-210H-x-S175 |

|      |
|------|
| SIZE |
| A4   |
| VER  |
| R    |