


HDMI-19APL3x-S165


外殼電鍍材質 :


G : Au
NI : Nickel

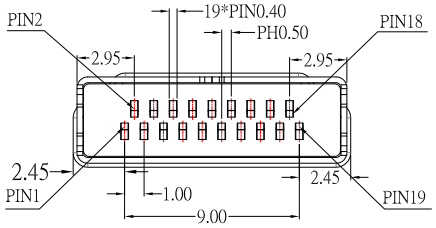








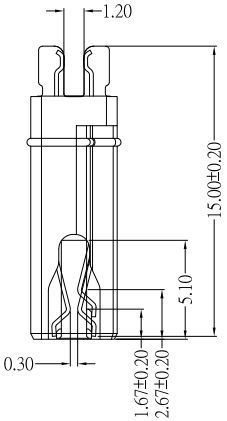




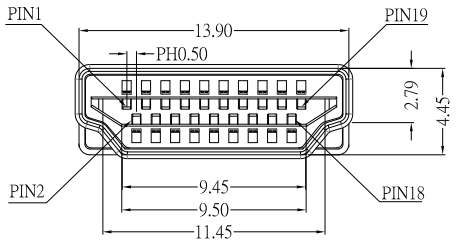

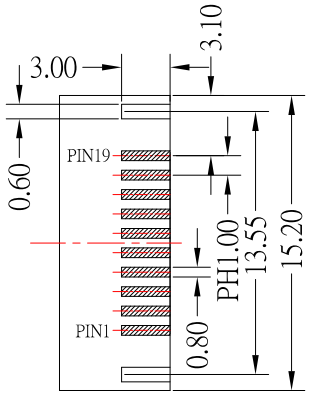



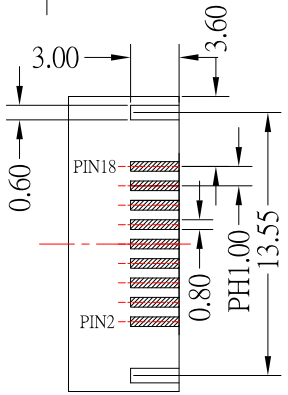

NOTE :

1.SPECIFICATION:
- 1.1 CURRENT RATING: 0.5 Amp Max.
- 1.2 VOLTAGE RATING: 40 V ac(r.m.s) Max.
- 1.3 CONTACT RESISTANCE: 10mΩ Max.
- 1.4 NSULATION RESISTANCE:100MΩ Min.
- 1.5 DIELECTRIC WITHSTANDING VOLTAGE: AC 500V Min. (for 1 minute)
- 1.6 OPERATION TEMPERATURE RANGE: -25°C~85°C

2.MECHANICAL
- 2.1 INSERTION FORCE: 4.5KGF MAXMUM
- 2.1 WITHDRAWAL FORCE: 1.0KGF MINIMUM;4.0KGF MAXMUM

3.Material:
- 3.1 Housing: LCP
- 3.2 Contact: Phosphor Bronze
- 3.3 Shell: SPCC

4. Finish:
- 4.1 Contact: Plated Gold in Mating Area ; Tin Plated on Solder Balls ; Nickel under plated overall
- 4.2 Shell: Nickel / Gold under Plated surface layer

ITEM NO.	DESCRIPTION	DRAWN	DATE
10	更新Contact材質	Jack	112321
9	更新料號	Jack	111821
8	更新外殼材質	Jack	111621
7	更新圖面	Jack	080219
6	更新外殼底部樣式	Jack	112718
5	更新端子鍍層	Jack	112317
4	更新為A0版	Jack	042017
3	更新夾板尺寸	Jack	022515
2	更新鍍層代號及更新pcb layout尺寸	Jack	112714
1	更新鍍層代號	Jack	111214

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S | UNITS | MM

DRAWN BY: Jack Lu	DATE 11/23/21	MAT'L	
CHECKED BY: Jacky Chen	DATE 11/23/21	FINISH	
APPROVED BY: Tony Kao	DATE 11/23/21	SCALE 1 : 1	SHEET NO. 1 of 1

TITLE	CONNECTOR		
MODLE	HDMI A TYPE 夾板公頭 H:1.2mm		
DWG NO.	HDMI-19APL3x-S165	SIZE	A4
PART NO.	HDMI-19APL3x-S165	VER	R10