


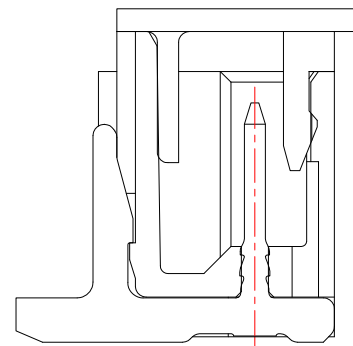
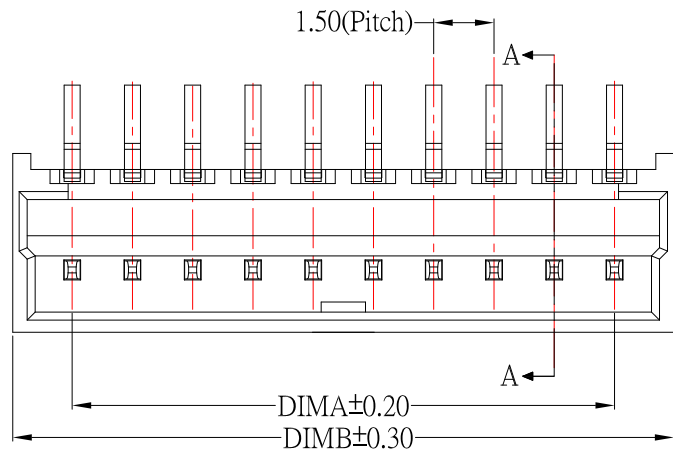


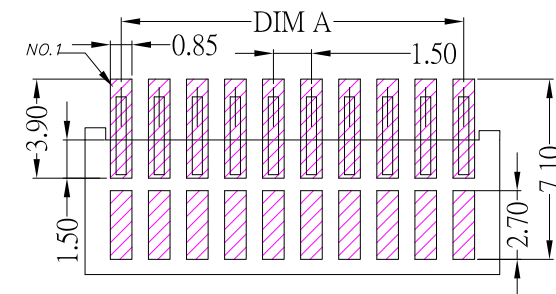

WITH COVER



P.C.B LAYOUT

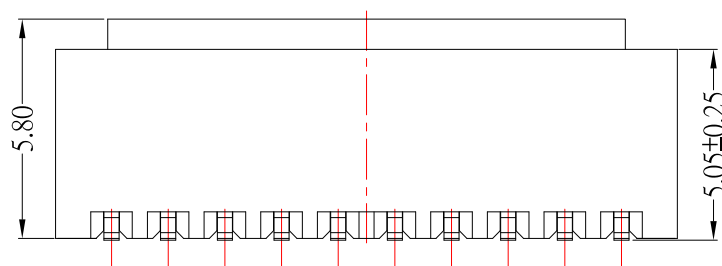

CKT	DIM A	DIM B
2	1.50	4.30
3	3.00	5.80
4	4.50	7.30
5	6.00	8.80
6	7.50	10.30
7	9.00	11.80
8	10.50	13.30
9	12.00	14.80
10	13.50	16.30
11	15.00	17.80
12	16.50	19.30
13	18.00	20.80
14	19.50	22.30
15	21.00	23.80

SPECIFICATIONS

- 1.Current rating : 3.0A , AC / DC
- 2.Voltage rating : 350V, AC / DC
- 3.Temperature rating : -25°C ~ +85°C
- 4.Insulation resistance : 1000MΩ min.
- 5.Contact resistance : 20mΩ /Max

Material:

- 1.Housing : LCP
- 2.Contact : Brass,Tin over Nickel

ITEM NO.	DESCRIPTION	DRAWN	DATE
3	更新材質	Jack	121724
2	更新PCB LAYOUT樣式外型	Jack	051024
1	更新圖面	Jack	041124

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD. ANGEL'S

UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	12/17/24	FINISH	MODLE	WAFER P : 1.50mm SMT 180度
CHECKED BY:	DATE	SCALE	DWG NO.	SIZE
Jacky Chen	12/17/24	1 : 1	WF-1500VSxx-S304	A4
APPROVED BY:	DATE	SHEET NO.	PART NO.	VER
Tony Kao	12/17/24	1 of 1	WF-1500VSxx-S304	R3