
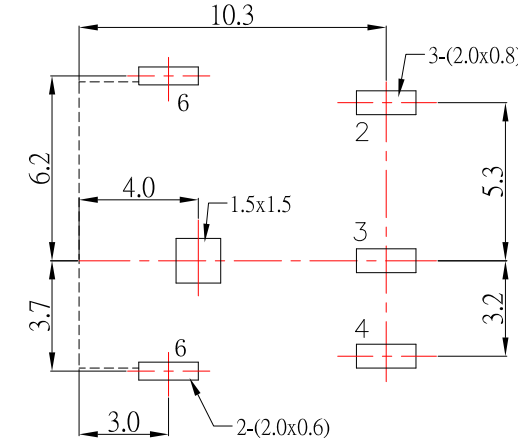
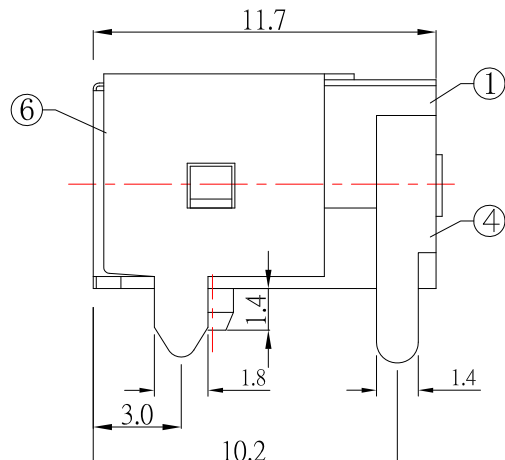


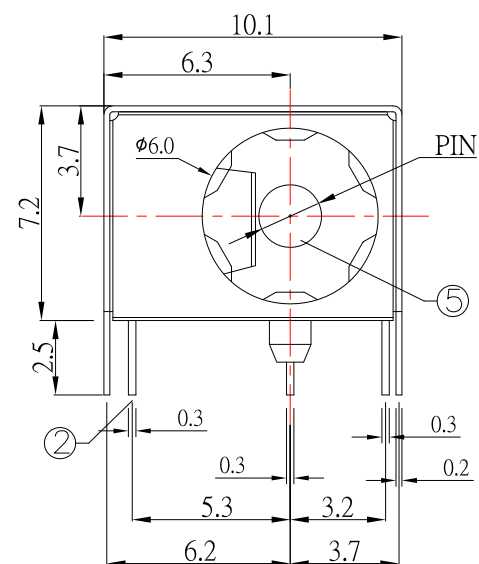

P.C.B LAYOUT
TOP VIEW

SPECIFICATION

- 1.Rating : DC 20V 5.0A
- 2.Contact resistance : $\leq 30m\Omega$
- 3.Insulation resistance : $\geq 100M\Omega$
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-30N
- 6.life test : 5,000 cycles

MODEL NO.	DC-069HS-x
SCHEMATIC	
CENTER PIN(X)	$\phi 2.0\text{ mm}$ $\phi 2.5\text{ mm}$

7	COVER	1	SUS	Ni-Plating
6	CONTACT FOOT	1	BRASS	Tin-Plating
5	PIN	1	BRASS	Ni-Plating
4	CONTACT FOOT	1	BRASS	Ag-Plating
3	CURVE PIECE	1	BRASS	Ag-Plating
2	SPRING PIECE	1	PHOSPHOR BRONZE	Ag-Plating
1	HOUSING	1	PA9T	Black
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	06/18/21		MODLE	DC JACK 高電流 / 帶彈片帶外殼
CHECKED BY:	DATE	FINISH	DWG NO.	DC-069HS-x-S214
Jacky Chen	06/18/21	SCALE	1 : 1	SIZE A4
APPROVED BY:	DATE	SHEET NO.	PART NO.	DC-069HS-x-S214
Tony Kao	06/18/21	1 of 1		VER R13