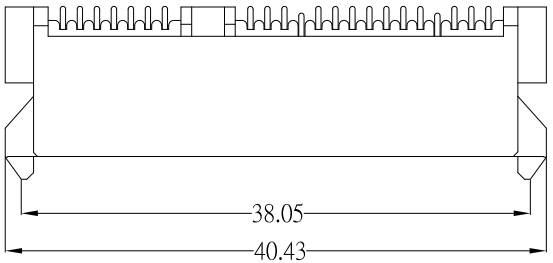

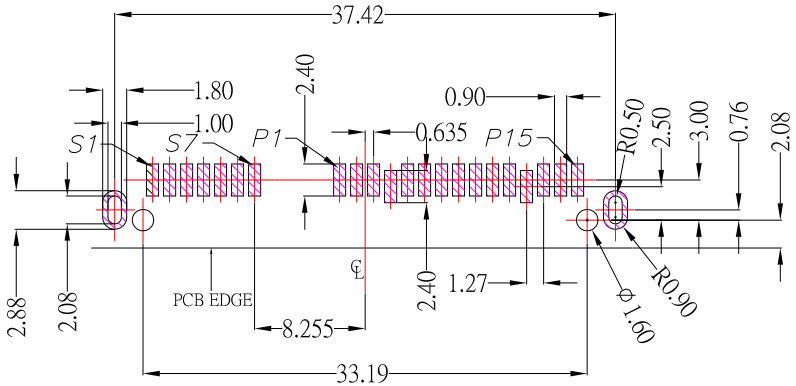



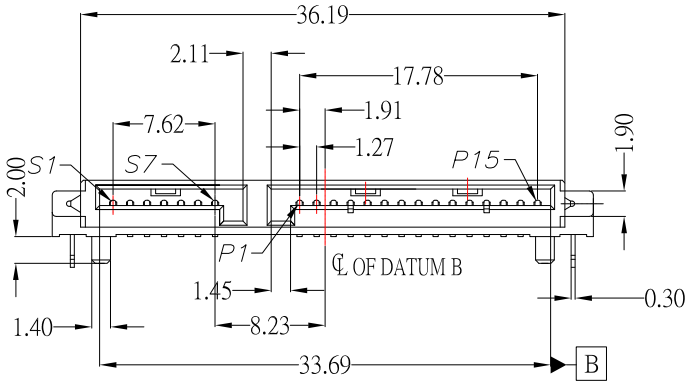

RECOMMENDED PCB LAYOUT

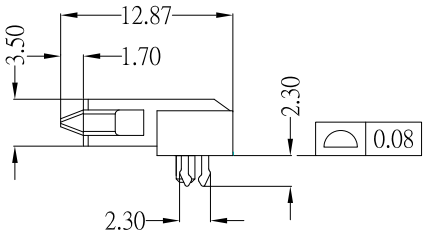

SATA-F22-42S1Ax-S268

鍍層厚度 :

Blank : 1u"
2 : 15u"
3 : 30u"

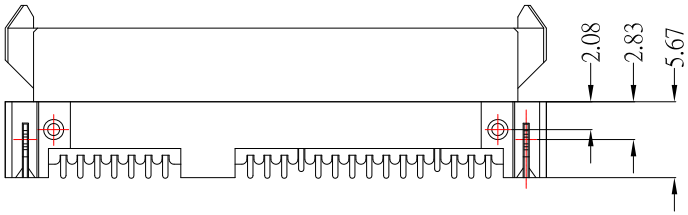

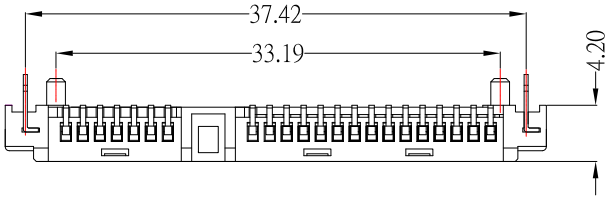

SPECIFICATION:

1.MATERIAL:

1.1 HOUSING: LCP , UL 94V-0 , Black.

1.2 CONTACT: PHOSPHOR BRONZE

1.3 BOARD LOCK: BRASS

2.Finish:

2.1 CONTACT: PLATED GOLD IN MATING AREA ;
TIN PLATED ON SOLDER BALLS ;
NICKEL UNDER PLATED OVERALL

2.2 BOARD LOCK: TIN PLATED ON SOLDER BALLS ;
NICKEL UNDER PLATED OVERALL

ITEM NO.	DESCRIPTION	DRAWN	DATE
1	更新爲A0版	Jack	040815

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ±0.2; Above 5 ~ 15 ±0.3; Above 15 ~ 30 ±0.4; Above 30 ~ 50 ±0.5; Angle ±0.3°

3RD. ANGEL'S | UNITS MM

DRAWN BY: Jack Lu	DATE 04/08/15	MAT'L	
CHECKED BY: Jacky Chen	DATE 04/08/15	FINISH	
APPROVED BY: Tony Kao	DATE 04/08/15	SCALE 1 : 1	SHEET NO. 1 of 1

TITLE	CONNECTOR		
MODLE	SATA 7+15PIN F R/A SMT H:4.2mm 板上型		
DWG NO.	SATA-F22-42S1Ax-S268	SIZE	A4
PART NO.	SATA-F22-42S1Ax-S268	VER	A0