




Model NO.	DC-081HS-1.65	DC-081HS-2.0	DC-081HS-2.5
PIN(X)	φ1.65	φ2.0	φ2.5

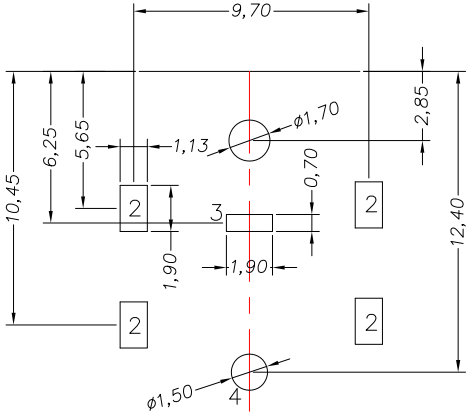

P.C.B LAYOUT
TOP VIEW

SPECIFICATION

- 1.Rating : DC 24V, 10.0A
- 2.Contact resistance : ≤ 50mΩ
- 3.Insulation resistance : ≥ 100MΩ
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-30N
- 6.life test : 5,000 cycles

6	COVER	1	SUS	
5	SPACER	1	PA9T (BLACK)	
4	BERRY PIN	1	BRASS	Ni-Plating
3	CCAW	1	PHOSPHOR BRONZE	Tin Plated over Ni
2	FOOT COVERLET	1	SUS	Ni-Plating
1	HOUSING	1	PA9T (BLACK)	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

17	更新尺寸和材質和尺寸選項	Jack	122325
16	更新材質	Jack	082621
15	更新尺寸公差	Jack	082521
14	更新鍍層	Jack	053121
13	更新材質及鍍層	Jack	052821
ITEM NO.	DESCRIPTION	DRAWN	DATE



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5
Above 5 ~ 15
Above 15 ~ 30
Above 30 ~ 50
Angle

±0.2
±0.3
±0.4
±0.5
±0.3°

3RD.
ANGEL'S

UNITS

MM

DRAWN BY:

Jack Lu

DATE

12/23/25

CHECKED BY:

Jacky Chen

DATE

12/23/25

APPROVED BY:

Tony Kao

DATE

12/23/25

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

JACK

DC JACK

DC-081HS-x-S214

DC-081HS-x-S214

SIZE

A4

VER

R17