

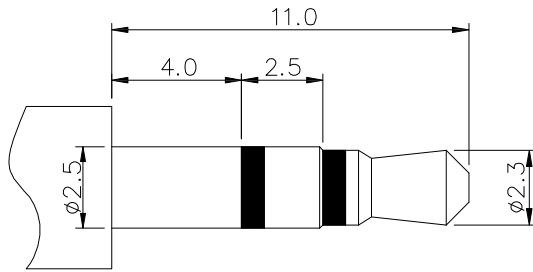


P. C. B LAYOUT  
TOP VIEW



ø2.50mm 3 POLE PLUG

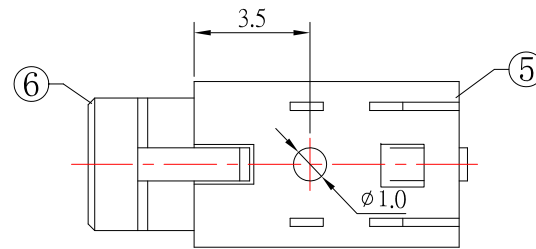

SPECIFICATION

1. Rating : DC 30V 0.5A
2. Contact resistance :  $\leq 30m\Omega$
3. Insulation resistance :  $\geq 100M\Omega$
4. Withstand voltage : 500VAC
5. Insertion and extraction force : 3-30N
6. life test : 5,000 cycles

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
⑥	AXIS SUPPORT	1	BRASS	Ni-Plating
⑤	HOUSING	1	PBT	
④	4# CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Plating
③	3# CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Plating
②	2# CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Plating
①	1# CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Plating

**CONTACT** 建倚科技股份有限公司  
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :  
 Up to 5 ±0.2  
 Above 5 ~ 15 ±0.3  
 Above 15 ~ 30 ±0.4  
 Above 30 ~ 50 ±0.5  
 Angle ±0.3

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	07/18/19			
CHECKED BY:	DATE	FINISH	MODLE	PHONE JACK
Jacky Chen	07/18/19			
APPROVED BY:	DATE	SCALE	DWG NO.	PJ-255-S124
Tony Kao	07/18/19	1 : 1		
SHEET NO.	1 of 1	PART NO.	PJ-255-S124	
				SIZE A4
				VER R1

ITEM NO.	DESCRIPTION	DRAWN	DATE
1	新增公差及PLUG圖示	Jack	071819