


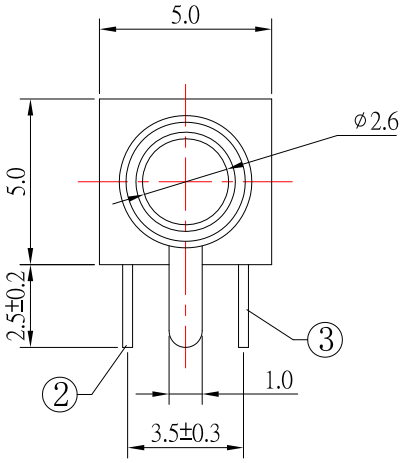


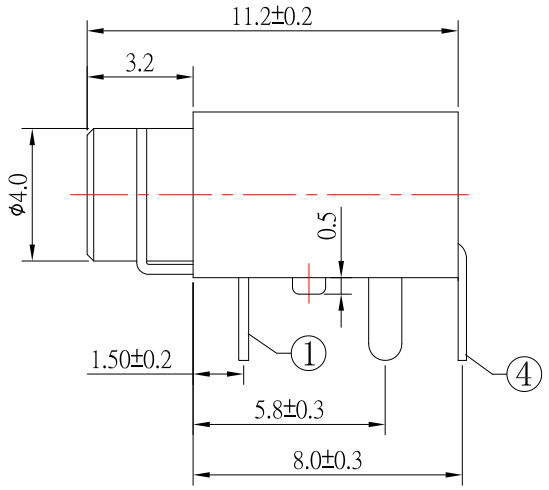


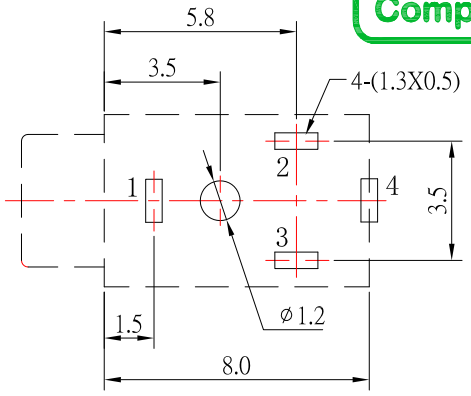


P. C. B LAYOUT
TOP VIEW

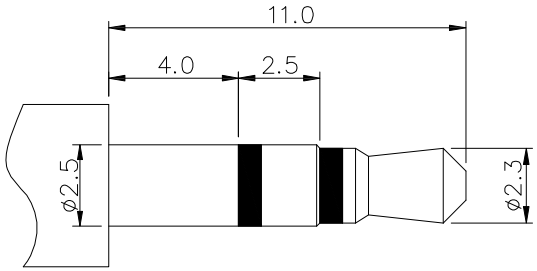

ø2.50mm 3 POLE PLUG

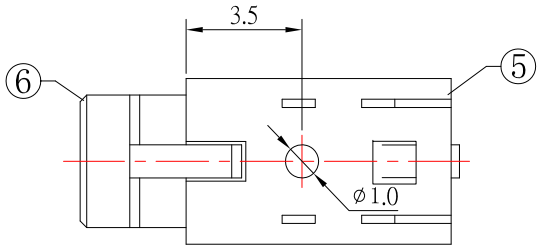



SPECIFICATION

1.Rating ：DC 30V 0.5A
2.Contact resistance：≤ 30mΩ
3.Insulation resistance：≥100MΩ
4.Withstand voltage：500VAC
5.Insertion and extraction force：3-30N
6.life test：5,000 cycles

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
⑥	AXIS SUPPORT	1	BRASS	Ni-Plating
⑤	HOUSING	1	PBT	
④	4# CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Plating
③	3# CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Plating
②	2# CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Plating
①	1# CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Plating

ITEM NO.	DESCRIPTION	DRAWN	DATE
1	新增公差及PLUG圖示	Jack	071819

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ±0.2; Above 5 ~ 15 ±0.3; Above 15 ~ 30 ±0.4; Above 30 ~ 50 ±0.5; Angle ±0.3°
3RD. ANGEL'S | UNITS MM

DRAWN BY: Jack Lu	DATE 07/18/19	MAT'L	
CHECKED BY: Jacky Chen	DATE 07/18/19	FINISH	
APPROVED BY: Tony Kao	DATE 07/18/19	SCALE 1 : 1	SHEET NO. 1 of 1

TITLE	JACK		
MODLE	PHONE JACK		
DWG NO.	PJ-255-S124	SIZE	A4
PART NO.	PJ-255-S124	VER	R1