


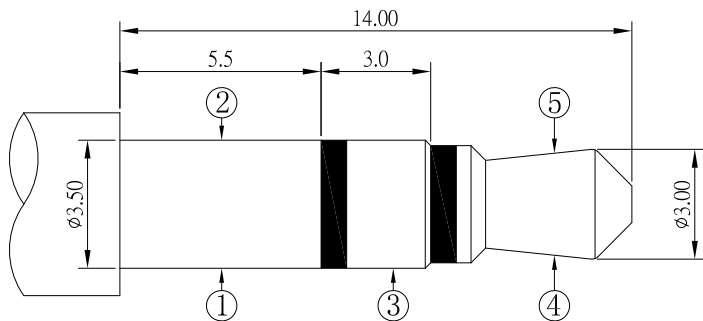
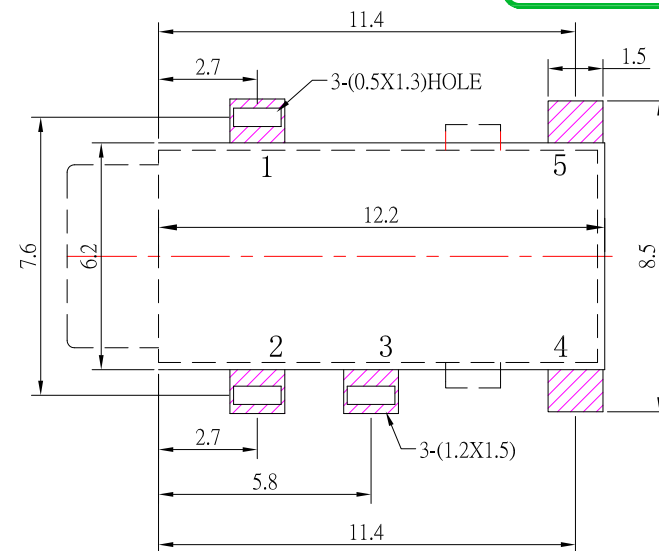


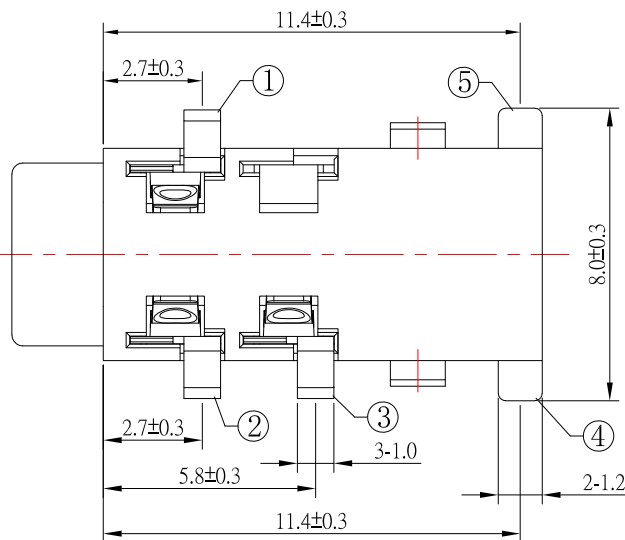


ø3.50mm 3 POLE PLUG

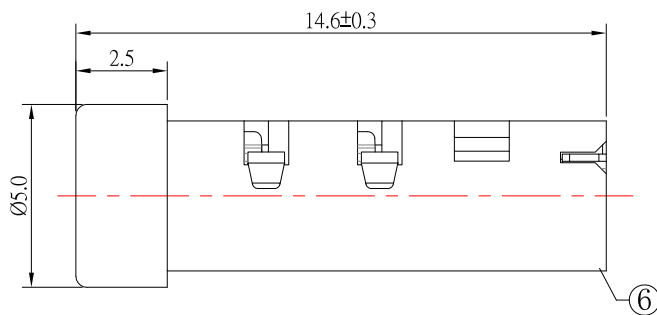

P.C.B LAYOUT
TOP VIEW

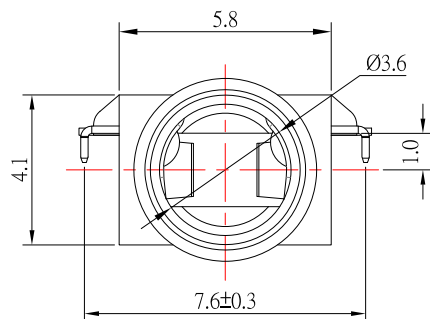

SCHEMATIC



SPECIFICATION

- Rating : DC 30V 0.5A ;
- Contact resistance : $\leq 30\text{m}\Omega$;
- Insulation resistance : $\geq 100\text{M}\Omega$;
- Withstand voltage : 500VAC ;
- Insertion and extraction force : 3-30N;
- life test : 5,000 cycles °

6	HOUSING	1	PA9T	
5	5# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
4	4# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
3	3# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
2	2# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
1	1# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING

4	更新圖面	Jack	071024
3	更新樣式	Jack	082119
2	更新尺寸	Jack	080519
1	新增PLUG	Jack	121318
ITEM NO.	DESCRIPTION	DRAWN	DATE

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	07/10/24			
CHECKED BY:	DATE	FINISH	MODLE	PHONE JACK
Jacky Chen	07/10/24			
APPROVED BY:	DATE	SCALE	DWG NO.	PJ-S3112A1-S124
Tony Kao	07/10/24	1 : 1		
		SHEET NO.	1 of 1	PART NO. PJ-S3112A1-S124
				SIZE A4
				VER R4