
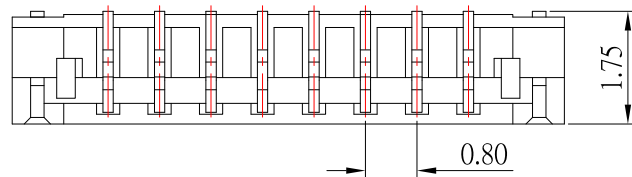


P.C.B LAYOUT MOUNTING PATTERN

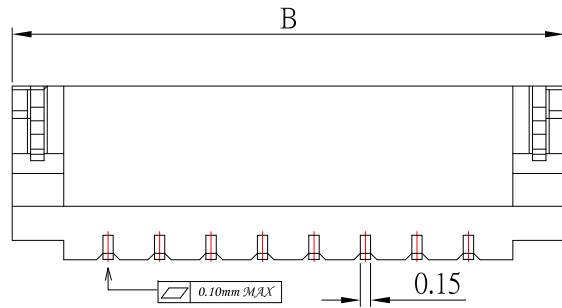

PIN	DIMENSION MM(IN)		
	A	B	C
2P	0.8	3.8	1.82
3P	1.6	4.6	2.62
4P	2.4	5.4	3.42
5P	3.2	6.2	4.22
6P	4.0	7.0	5.02
7P	4.8	7.8	5.82
8P	5.6	8.6	6.62
9P	6.4	9.4	7.42
10P	7.2	10.2	8.22
11P	8.0	11.0	9.02
12P	8.8	11.8	9.82
13P	9.6	12.6	10.62
14P	10.4	13.4	11.42
15P	11.2	14.2	12.22
16P	12.0	15.0	13.02
17P	12.8	15.8	13.82
18P	13.6	16.6	14.62
19P	14.4	17.4	15.42
20P	15.2	18.2	16.22

**SPECIFICATIONS**

- 1.Current rating : 1.0A AC , DC
- 2.Voltage rating : 50V AC , DC
- 3.Temperature rating : -25°C ~ +85°C
- 4.Insulation resistance : 100MΩ min.
- 5.Withstand voltage : 250V AC / minute
- 6.Contact resistance : 20mΩ/Max

**Material:**

- 1.Housing : LCP, UL94V-0
- 2.Contact : Phosphor Bronze, Tin or Gold Plated
- 3.Leg : Phosphor Bronze, Tin Plated over all Nickel

ITEM NO.	DESCRIPTION	DRAWN	DATE

**CONTACT** 建倚科技股份有限公司  
**CONTACT TECHNOLOGY CORP.**

TOLERANCE UNLESS OTHERWISE STATED :  
 Up to 5 ±0.2  
 Above 5 ~ 15 ±0.3  
 Above 15 ~ 30 ±0.4  
 Above 30 ~ 50 ±0.5  
 Angle ±0.3

3RD. ANGEL'S



UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	05/11/15	FINISH	MODLE	WAFER 0.8mm . SMT 90度
CHECKED BY:	DATE	SCALE	DWG NO.	WF-0800RSxx-S304
Jacky Chen	05/11/15	1 : 1	PART NO.	WF-0800RSxx-S304
APPROVED BY:	DATE	SHEET NO.	1 of 1	SIZE A4
Tony Kao	05/11/15	VER	R	