





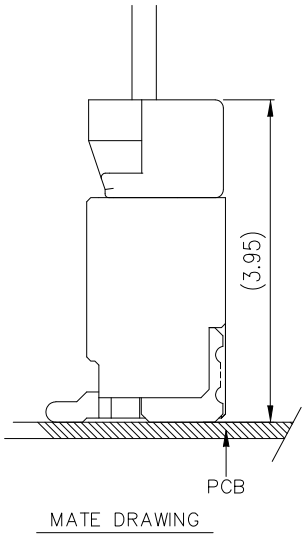


MATE DRAWING

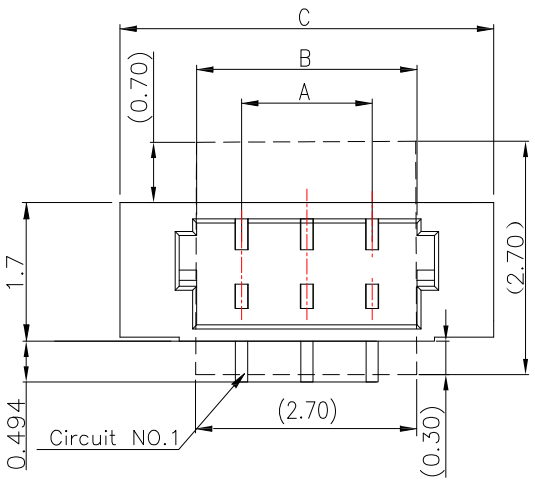



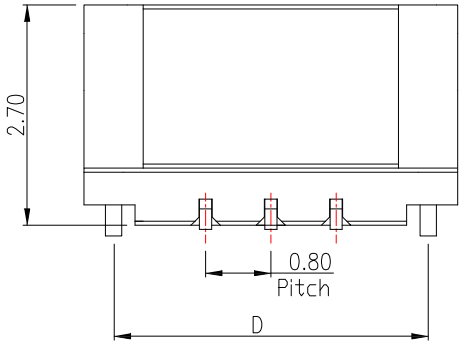

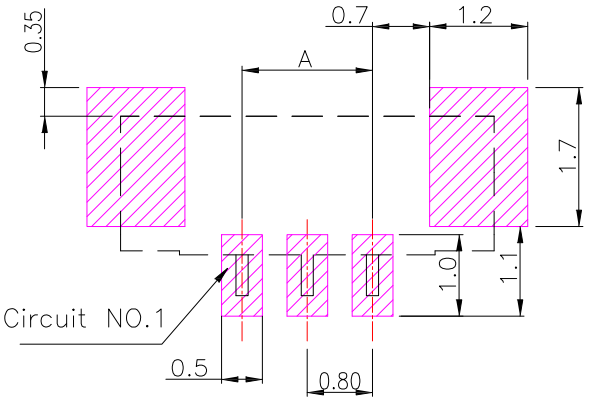

P.C.B LAYOUT

PART NO.	DIMA	DIMB	DIMC	DIMD
02	0.80	1.90	3.78	3.04
03	1.60	2.70	4.58	3.84
04	2.40	3.50	5.38	4.64
05	3.20	4.30	6.18	5.44
06	4.00	5.10	6.98	6.24
07	4.80	5.90	7.78	7.04
08	5.60	6.70	8.58	7.84
09	6.40	7.50	9.38	8.64
10	7.20	8.30	10.18	9.44
11	8.00	9.10	10.98	10.24
12	8.80	9.90	11.78	11.04
13	9.60	10.70	12.58	11.84
14	10.40	11.50	13.38	12.64
15	11.20	12.30	14.18	13.44
16	12.00	13.10	14.98	14.24
17	12.80	13.90	15.78	15.04
18	13.60	14.70	16.58	15.84
19	14.40	15.50	17.38	16.64
20	15.20	16.30	18.18	17.44

SPECIFICATIONS

1.Current rating : 0.7A AC , DC
2.Voltage rating : 30V AC , DC
3.Temperature rating : -25˚C ~ +85˚C
4.Insulation resistance : 100MΩ min.
5.Withstand voltage : 200V AC / minute
6.Contact resistance : 20mΩ/Max

Material:

1.Housing : LCP
2.Contact : Brass,Gold Plated over all Nickel
3.Fitting Nail : Brass,Gold Plated over all Nickel

ITEM NO.	DESCRIPTION	DRAWN	DATE
7	新增尺寸	Jack	040226
6	更新CAP樣式和尺寸	Jack	040126
5	新增尺寸	Jack	033126
4	更新圖面	Jack	021425
3	更新圖面	Jack	030122

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ±0.2; Above 5 ~ 15 ±0.3; Above 15 ~ 30 ±0.4; Above 30 ~ 50 ±0.5; Angle ±0.3°

3RD. ANGEL'S | UNITS MM

		DATE
DRAWN BY:	Jack Lu	04/02/26
CHECKED BY:	Jacky Chen	04/02/26
APPROVED BY:	Tony Kao	04/02/26

MAT'L		TITLE	CONNECTOR
FINISH		MODLE	WAFER 0.8mm . SMT 180 度
SCALE	1 : 1	DWG NO.	WF-0800VSxx-S304
SHEET NO.	1 of 1	PART NO.	WF-0800VSxx-S304

SIZE A4 | VER R8