


OPERATING POSITION

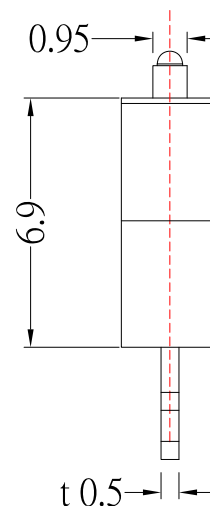

1. Rating : DC 30V 500mA ;
2. Operating force : 120gf Max ;
3. Operating position : 5.6 ± 0.15 mm ;
4. Contact resistance : 100m ohm Max ;
5. Operating life : 300,000 cycles °

[illegible]