


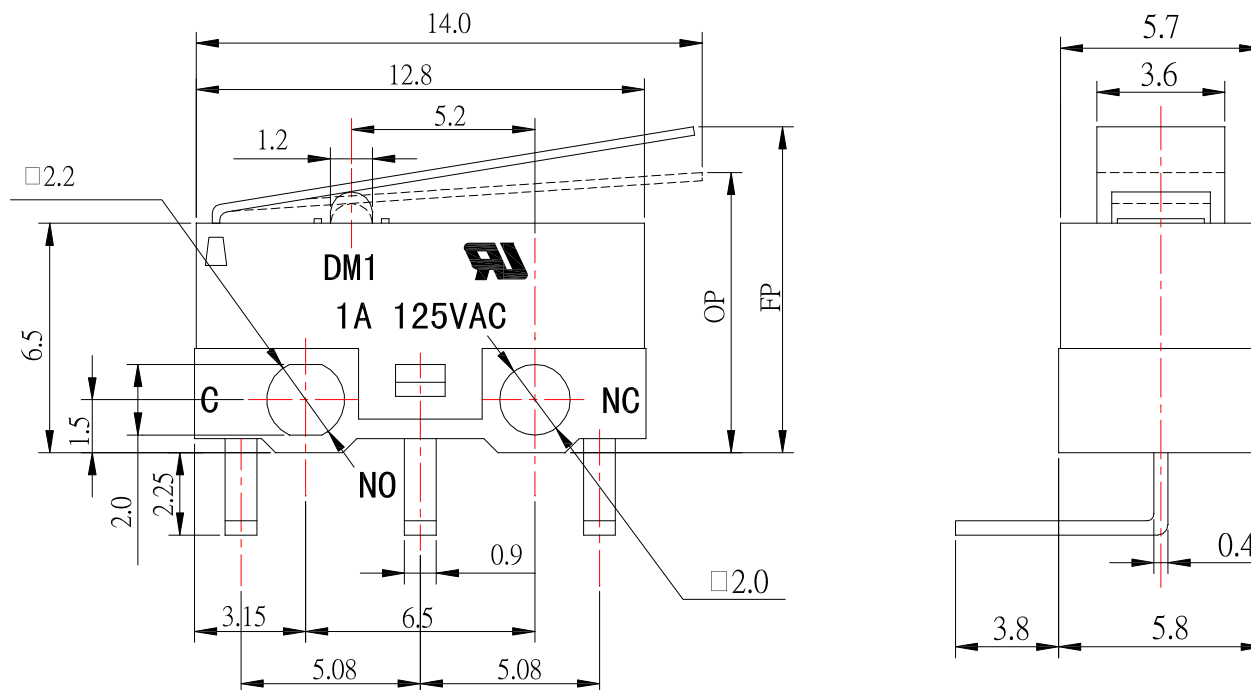

1. 功能規格			
1.1 額定電壓		AC125V 1A/DC5V 30mA	1.5 自由位置 (FP) 10.4 ± 0.8mm
			1.6 動作位置 (OP) 8.8 ± 0.8mm
1.2 接觸電阻 (CR)	≤ 50mΩ (初始值)	1.7 行程 (PT)	
1.3 操作力 (OF)	30 ± 15gf	1.8 靈敏度 (BT)	
1.4 回彈力 (RF)			
2. 可靠度參數			
2.1 機械壽命	500,000 CYCLES	2.5 焊接方式	手工焊
2.2 電器壽命	10,000/500,000 CYCLES	2.6 適用溫度	-25° C ~ +65° C
2.3 絕緣電阻	≥ 100MΩ DC500V (初始值)	2.7 適用濕度	<85%RH
2.4 耐壓強度	AC500V 1 minute (初始值)		

				CONTACT 建倚科技股份有限公司 CONTACT TECHNOLOGY CORP. TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ± 0.2 Above 5 ~ 15 ± 0.3 Above 15 ~ 30 ± 0.4 Above 30 ~ 50 ± 0.5 Angle ± 0.3° 3RD. ANGEL'S  UNITS MM	DRAWN BY: Frank Wu	DATE 06/01/12	MAT'L		TITLE SWITCH	
					CHECKED BY: Jacky Chen	DATE 06/01/12	FINISH		MODE MICRO SWITCH	
					APPROVED BY:	DATE	SCALE 1 : 1	DWG NO.	DM1-01C	SIZE A4
1	圖面更新	FrankWu	060112							VER C
ITEM NO.	DESCRIPTION	DRAWN	DATE			Tony Kao	06/01/12	SHEET NO. 1 of 1	PART NO. DM1-01C	
	A	B		C	D	E	F	G	H	I