

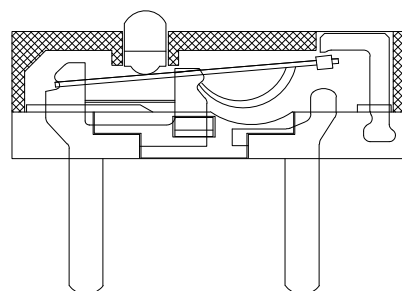



PCB LAYOUT

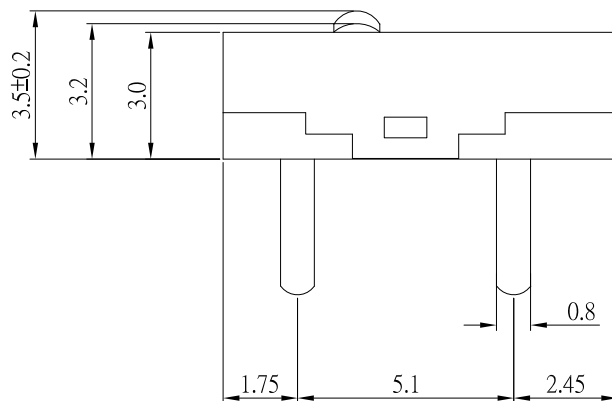

SCHEMATIC

SPECIFICATIONS

1. Rating : DC 12V 50mA
2. Contact Resistance : 100m Ω Max
3. Insulation Resistance : 100M Ω Min
4. Withstand Voltage : AC 250V
5. Operating Force : 70 $\pm$ 10gf
6. Operating Position : 3.2 $\pm$ 0.1 mm
7. Mechanical Life : 1,000,000 cycles Min

Button	1	POM	White
Cover	1	PBT	Black
Base	1	LCP	
Contact	1	Silver Alloy	
Shrapnel	1	Copper Alloy	
Terminal	3	BRASS	Plating Silver
PART NAME	QTY.	MATERIAL	REMARK



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 $\pm$ 0.2
Above 5 ~ 15 $\pm$ 0.3
Above 15 ~ 30 $\pm$ 0.4
Above 30 ~ 50 $\pm$ 0.5
Angle $\pm$ 0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao
DATE: 12/16/20
DATE: 12/16/20
DATE: 12/16/20

MATL
FINISH
SCALE
SHEET NO.

TITLE
MODLE
DWG NO.
PART NO.

SWITCH
MICRO SWITCH
DA-P2L-0P10-S105
DA-P2L-0P10-S105

SIZE
A4
VER
R3

ITEM NO.	DESCRIPTION	DRAWN	DATE
3	更新圖面	Jack	121620
2	更新料號	Jack	090517
1	新增尺寸	Jack	112613