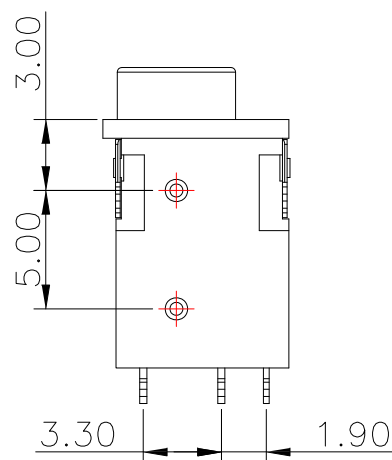
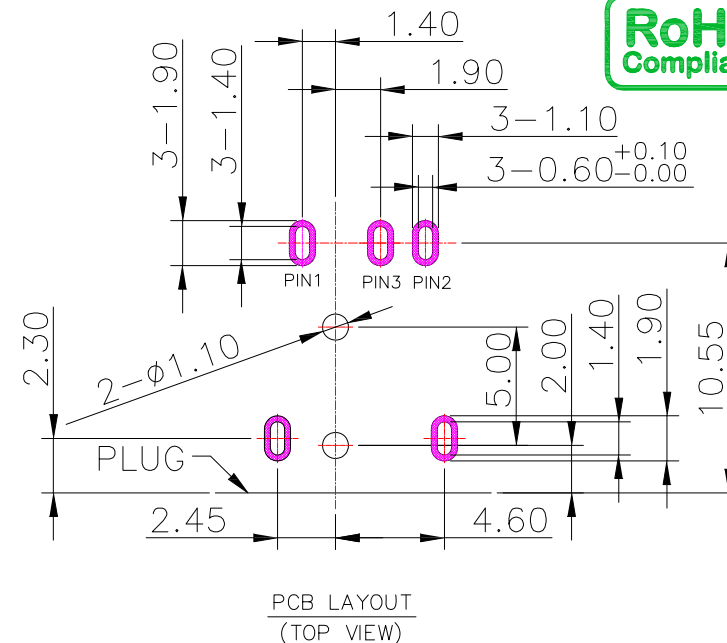
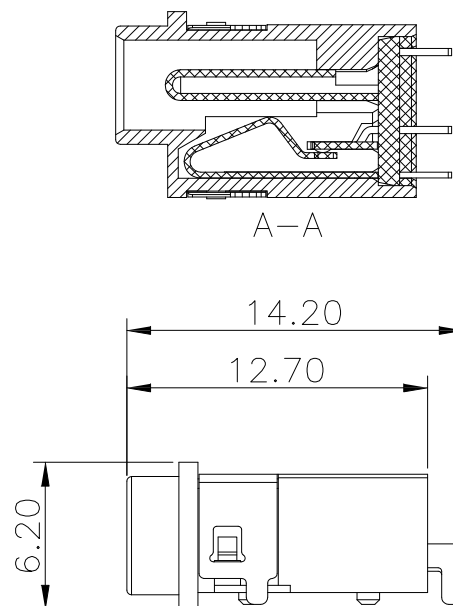
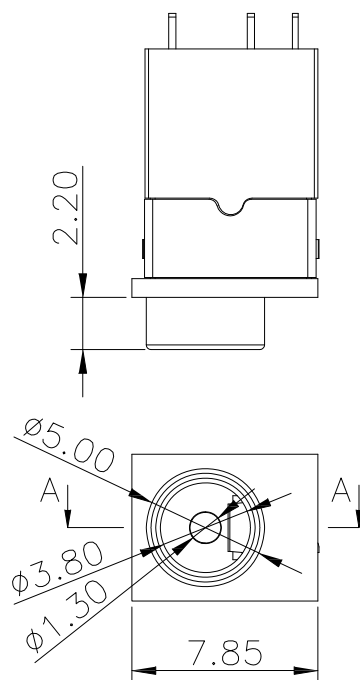


SCHEMATIC

SPECIFICATION

- 1.Rating : DC 30V, 3.0A
- 2.Contact resistance : $\leq 50\text{m}\Omega$
- 3.Insulation resistance : $\geq 100\text{M}\Omega$
- 4.Dielectric Withstanding Voltage : 500V AC

MATERIAL

HOUSING : TEMPERATURE PLASTIC
COVER : TEMPERATURE PLASTIC
CONTACT : COPPER ALLOY(Au Plated)



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE
01/19/18
DATE
01/19/18
DATE
01/19/18

MAT'L
FINISH
SCALE
SHEET NO.

TITLE
MODLE
DWG NO.
PART NO.

JACK
DC JACK 防水型
DC-WP1001HS-1.3-S377
DC-WP1001HS-1.3-S377

SIZE
A4
VER
R1