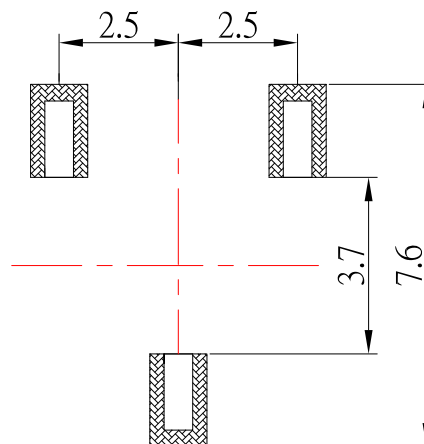
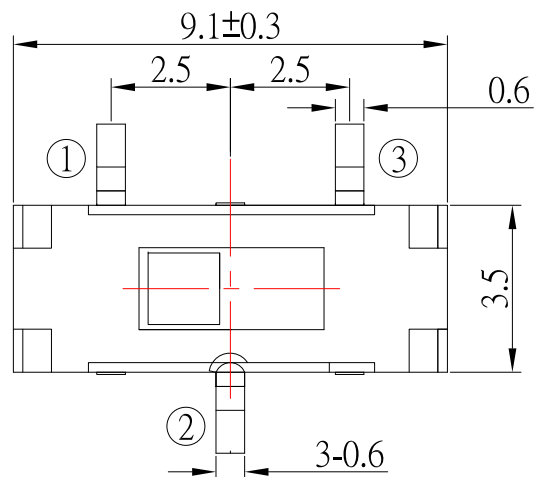




CIRCUIT DIAGRAM

P.C.B LAND PATTERN

SPECIFICATIONS

|                                 |                    |
|---------------------------------|--------------------|
| Rating                          | 0.3A 6V DC         |
| Insulation Resistance           | 50MΩ Min.          |
| Dielectric Withstanding Voltage | AC 250 V(50Hz)1min |
| Contact Resistance              | 100mΩ Max.         |
| Operating Force                 | 200 ± 50gf         |
| Operating Life                  | 10,000 cycles      |

Travel : 2.0±0.2

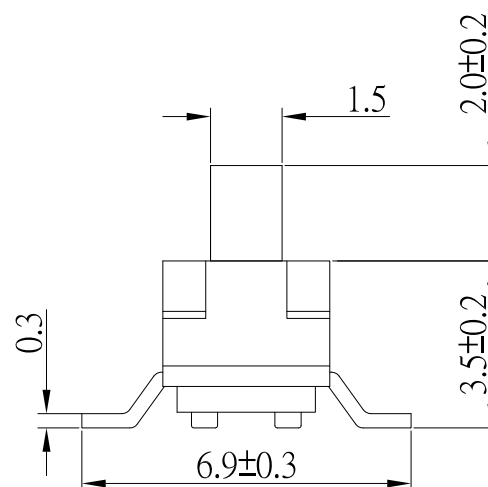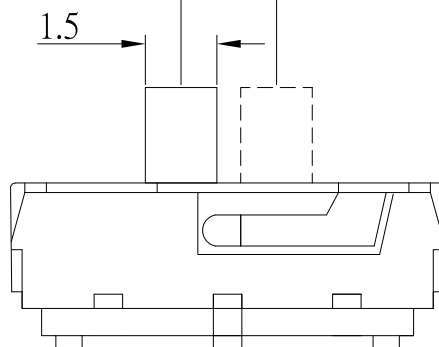

|     |             |     |                 |           |
|-----|-------------|-----|-----------------|-----------|
| E   | TERMINAL    | 3   | PHOSPHOR BRONZE | Ag plated |
| D   | CLIP        | 2   | PHOSPHOR BRONZE | Ag plated |
| C   | COVER       | 1   | SUS             |           |
| B   | CASE        | 1   | NYLON           | Black     |
| A   | SLIDER      | 1   | NYLON           | Black     |
| NO. | DESCRIPTION | QTY | MATERIAL        | PLATING   |



建倚科技股份有限公司  
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS  
OTHERWISE STATED :

Up to 5 ±0.2  
Above 5 ~ 15 ±0.3  
Above 15 ~ 30 ±0.4  
Above 30 ~ 50 ±0.5  
Angle ±0.3°

3RD.  
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu  
CHECKED BY: Jacky Chen  
APPROVED BY: Tony Kao

DATE: 08/24/21  
DATE: 08/24/21  
DATE: 08/24/21

MATL:  
FINISH:  
SCALE: 1 : 1  
SHEET NO. 1 of 1

TITLE: SWITCH  
MODLE: SLIDE SWICTH  
DWG NO. SS-B35S-B-S246  
PART NO. SS-B35S-B-S246

SIZE: A4  
VER: R1

|          |             |       |        |
|----------|-------------|-------|--------|
| 1        | 新增Travel    | Jack  | 082421 |
| ITEM NO. | DESCRIPTION | DRAWN | DATE   |